

TECHNICAL INFORMATION

AW908SD Varos



Surface Mounted
Adjustable

Application Descriptions:

- Surface Mounted, Adjustable
- Internal or External Locations, Low and High Bay Lighting
- Carparks, Carpark Entries, Loading Docks, Sports Halls, Warehouses and High Ceiling Applications

Product Name	VAROS
Description	High Powered, Slimline, Ceiling Mounted, Tilttable, High Bay, LED Luminaire
Material	Die Cast Aluminium, Anodized Aluminium Reflector, Flat Tempered Glass Cover, Chemical Anti Corrosion and UV Resistant Paint Coating
Dimensions	Diameter: 450mm; Height: 195mm
LED Details	80/100/120W Samsung COB, 3000K or 4000K available, CRI>80, Beam Angle: 40/80°, 10,000-14,000
Driver	Integral LED Driver
IP Rating	IP65
IK Rating	IK08
Installation	Surface Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com

TECHNICAL INFORMATION

Order Code:


AW908RD-(Colour Finish)-(Wattage)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW908RD-GR-80-3K-40°-ND


Options:

Colour Finish	Wattage	Temperature	Beam Angle	Dimming
GR (Grey)	80	3K (3000K)	40°	ND (Non-Dim)
	100	4K (4000K)	80°	
	120	5K (5000K)		
		6K (6000K)		

Dimensions Line Diagram:

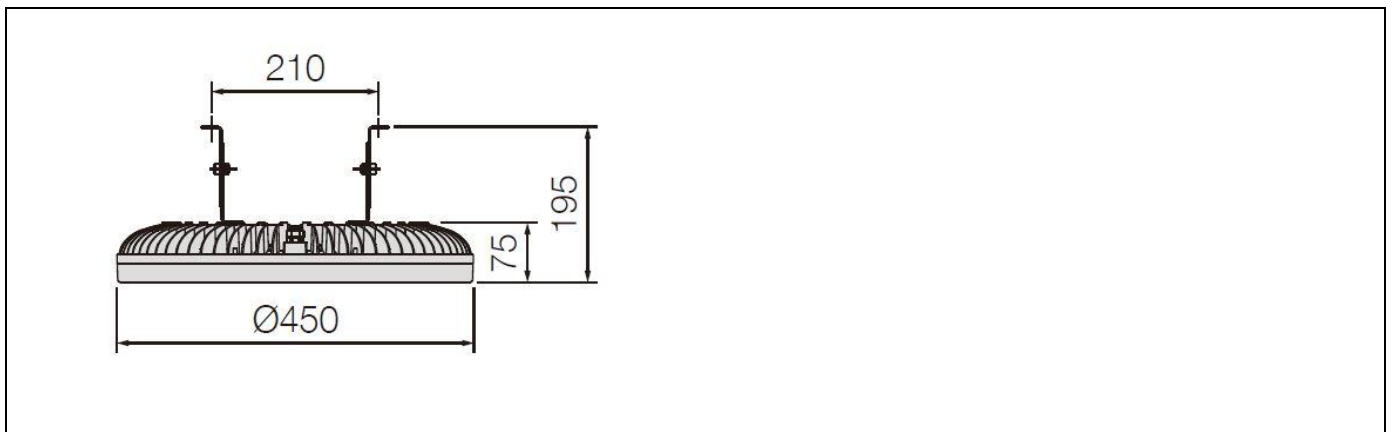

Photometrics:

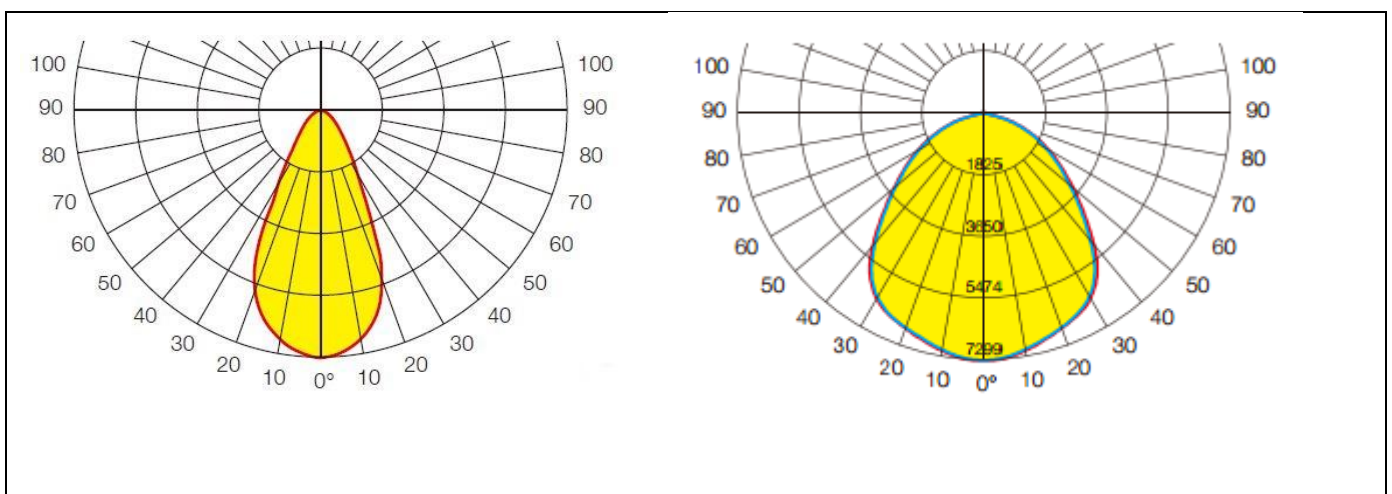

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com