

TECHNICAL INFORMATION

AW156BD Cavalier S



Floor Mounted
Fixed

Application Description:

- Floor Mounted, Fixed
- Exterior Areas, Landscaping, All-round Illuminance, Vandal and Corrosion Resistant, Low Glare
- Parks and Amenities, Pathways, Planter Areas, Gardens, Building Perimeters, Carpark Boundaries, Pedestrian and Foreshore Perimeter Applications

Product Name	CAVALIER S
Description	High Powered Downwards Dispersed Cylindrical LED Bollard
Material	Die cast Aluminium Body, Powder Coated and Pre-Treated for Outdoor Use, PMMA Diffuser, Surface Anti-Age Spray Processed, Stainless Steel Screws
Dimensions	Height: 1000 mm; Width: 168mm; Base-plate: 202mm
Driver Details	Integral Non-Dimmable Driver 25W SMD LED, 3000K/4000K, 780 Luminaire Luminous Flux @ 3000K
IP Rating	IP65
IK Rating	IK08
Installation	Floor Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com

TECHNICAL INFORMATION

ORDER CODE


AW156BD-(Colour Finish)-(Temperature)-(Dimming)

Example: AW156BD-SL-3K-ND


Options:

Colour Finish	Temperature	Dimming
SL (Silver)	3K (3000K)	ND (Non-Dim)

Dimensions Line Diagram:

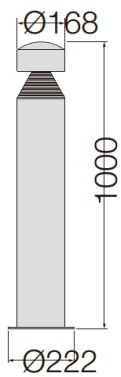

Photometrics:

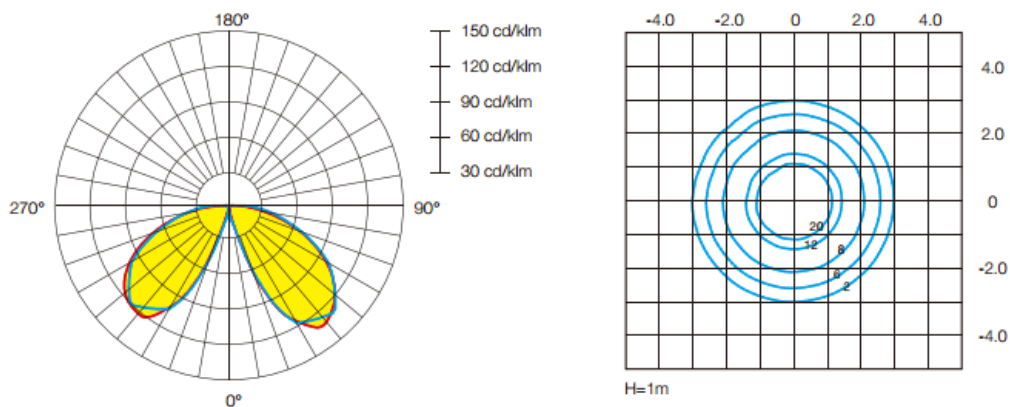

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com

TECHNICAL INFORMATION

Product Application Photos:



We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com