

## TECHNICAL INFORMATION

### AW164-2BD Malstrom L



Floor Mounted  
Fixed

#### Application Description:

- Floor Mounted, Fixed
- Interiors or Exterior Areas, Decorative
- Shopping Centres, Retail Areas, Building Entries, Parks, Pathways, Planter Areas, Residential Landscaping, Building or Carpark Boundary Applications

<b>Product Name</b>	<b>MALSTROM L</b>
<b>Description</b>	700mm Height, Inground Architectural LED Bollard
<b>Material</b>	316 Grade Stainless Steel Base Plate, PMMA Diffused Body, PG-9 PVC Gland
<b>Dimensions</b>	Height: 700mm; Bollard Diameter: 60mm; Base Diameter: 100mm
<b>Details</b>	5.5W COB LED, 3000K/4000K Option, CRI >82, 200 Luminaire Luminous Flux @ 3000K
<b>IP Rating</b>	IP67
<b>Installation</b>	Wall Mounted
<b>Driver</b>	Integral LED Driver

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwellighting.com.au](mailto:sales@actwellighting.com.au)  
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwellighting.com](http://www.actwellighting.com)

## TECHNICAL INFORMATION

### ORDER CODE


**AW164-2BD-(Colour Finish)-(Temperature)-(Dimming)**

Example: AW164-2BD-CL-3K-ND

Options:

Colour Finish	Temperature	Dimming
CL (Clear)	3K (3000K)	ND (Non-Dim)
	4K (4000K)	

Dimensions Line Diagram:

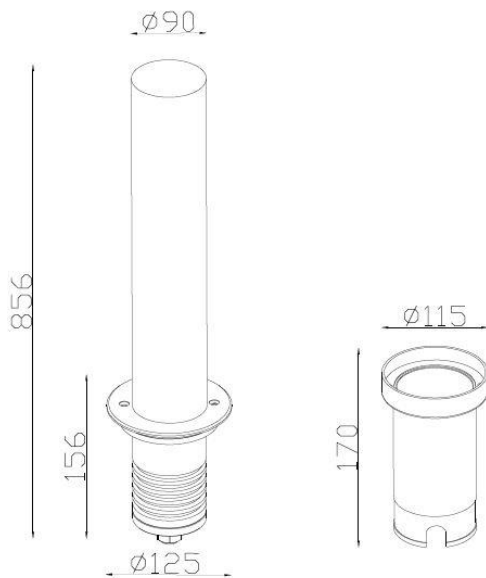

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwelllighting.com.au](mailto:sales@actwelllighting.com.au)

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwelllighting.com](http://www.actwelllighting.com)