

TECHNICAL INFORMATION

AW585SD Arun 20



Surface Mounted
Adjustable

Application Description:

- Surface Mounted, Adjustable
- Internal Areas; High Adjustability and Spotlighting Requirements
- Galleries and Showrooms, Wall and Signage Lighting, Retail and Hospitality Applications

Product Name	ARUN 20
Description	Adjustable Surface Mounted, 358° Swivel and 90° LED Luminaire
Material	Die Cast Aluminium Base and Body, Parabolic Reflector, Polycarbonate Black Baffle Trim
Dimensions	Diameter: 125mm; Head Height: 155mm; Base Dia: 125mm
Driver Details	Integral LED Driver 20W COB LED, 3000K or 4000K available, 24/60° Beam, CRI> 85, 1450 Luminaire Luminous Flux @ 60° 3000K
IP Rating	IP20
IK Rating	IK03
Installation	Surface Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

ORDER CODE


AW585SD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW585SD-WH-3K-24°-ND



Options:

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	3K (3000K)	24°	ND (Non-Dim)
BK (Black)	4K (4000K)	60°	

Dimensions Line Diagram:

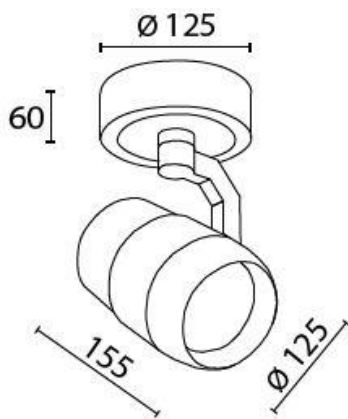

Photometrics:

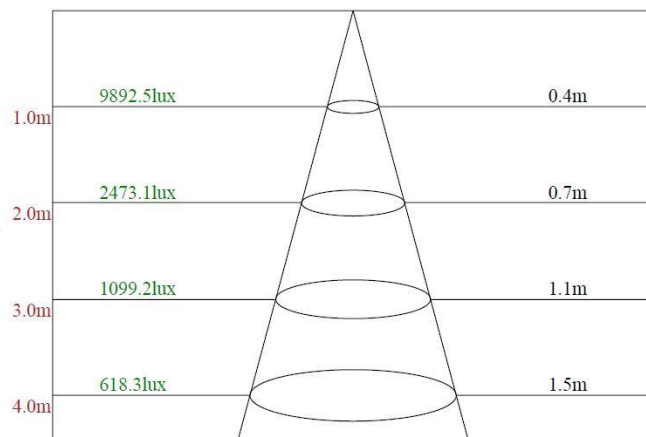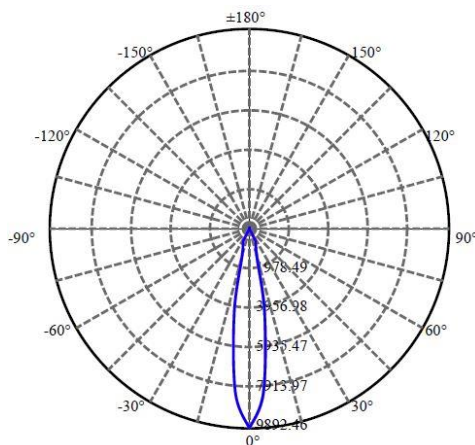



24 Degree Beam

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com

TECHNICAL INFORMATION

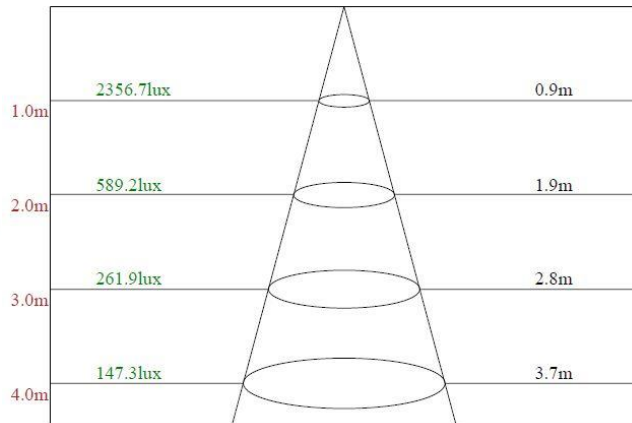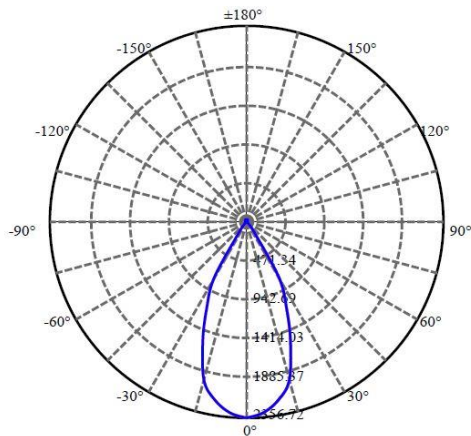

60 Degree Beam

Product Application Photos:



We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com