

TECHNICAL INFORMATION

AW6300-2EW Kibo Half



Wall Mounted
Fixed

Application Description:

- Wall Mounted, Fixed
- Interior and Exterior Areas; Ambient Lighting
- Residential Living Areas, Balconies and Patios, Building Wall Perimeters, Commercial Offices, Building Entries, Retail and Hospitality, Stairs, Hallways, Corridors and Pathway Applications

Product Name **KIBO HALF**

Description	Exterior, Rectangular, Down Only, Wall Mounted, LED Luminaire with Integral Driver
Material	Die Cast Aluminium Body & Frame, Powder coated and Pre-treated for Outdoor Use, Frosted Glass Diffuser, Silicone Rubber Gasket, Rubber Back Cover, IP65 Connector Box
Dimensions	Height: 81mm; Width: 68mm; Projection: 92mm
Driver	Integral LED Driver
Details	3W SMD LED, 3000K or 4000K Available, CRI>80, 110 Luminaire Luminous Flux @ 3000K
IP Rating	IP65
IK Rating	IK04
Installation	Wall Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

ORDER CODE


AW6300-2EW-(Colour Finish)-(Temperature)-(Dimming)

Example: AW6300-2EW-WH-3K-ND


Options:

Colour Finish	Temperature	Dimming
WH (White)	3K (3000K)	ND (Non-Dim)
BK (Black)	4K (4000K)	
GR (Graphite)		

Dimensions Line Diagram:

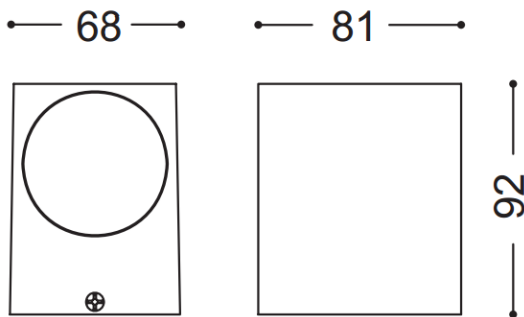

Product Application Photos:

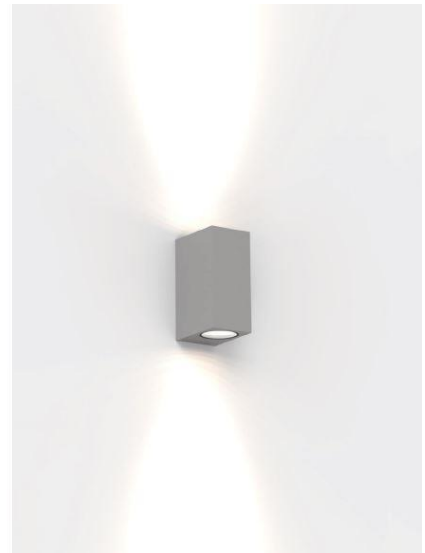

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com