

## TECHNICAL INFORMATION

### AW6301-2EW Hyperion R Down



Wall Mounted  
Fixed

#### Application Description:

- Wall Mounted, Fixed
- Interior and Exterior Areas; Higher Ambient Lux Level Requirements
- Residential Areas with High Walls, Commercial Offices, Lobby Entries, Retail and Hospitality, Shopping Centers, Education and Medical Buildings, Transport Facilities, Storages and Warehouses, Airport Applications

<b>Product Name</b>	<b>HYPERION R DOWN</b>
<b>Description</b>	High Powered, Weatherproof, Vandal Resistant, One Directional, Cylindrical LED Wall Light
<b>Material</b>	Extruded Aluminium, High Corrosion Resistance, 4mm Tempered Glass
<b>Dimensions</b>	Height: 280mm; Width: 210mm; Projection: 150mm
<b>Driver</b>	Integral LED Driver
<b>Details</b>	30W COB LED, 3000K and 4000K available, CRI>80, 1540 Luminaire Luminous Flux @ 3000K
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK08
<b>Installation</b>	Wall Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwelllighting.com.au](mailto:sales@actwelllighting.com.au)  
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwelllighting.com](http://www.actwelllighting.com)

## TECHNICAL INFORMATION

### ORDER CODE


AW6301-2EW-(Colour Finish)-(Temperature)-(Dimming)

Example: AW6301-2EW-BK-3K-ND

Options:

Colour Finish	Temperature	Dimming
WH (White)	3K (3000K)	ND (Non-Dim)
GR (Grey)	4K (4000K)	
BK (Black)		

Dimensions Line Diagram:

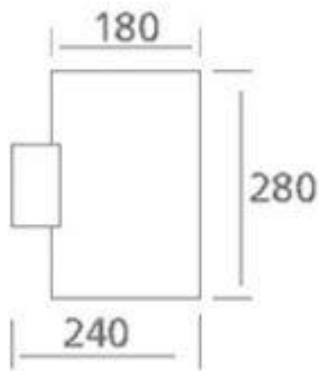

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwelllighting.com.au](mailto:sales@actwelllighting.com.au)

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwelllighting.com](http://www.actwelllighting.com)