

AW9214P Diamante





Application Description:

- Pole Top Mounted, Fixed
- Internal or External Locations; Low or High Bay Flood Lighting
- Carparks, Walkways, Pathways, Streets, Public Amenities, Parks, Warehouses, Shopping Centres and Hangars

| Product Name | DIAMANTE | | | |
|---------------------|---|--|--|--|
| Description | Top Mounting, Symmetric or Asymmetric Beam Options, Recommended for 3-6m Height, with Maintenance Access Hatch, High Corrosion Resistance, LED Pole Top Light | | | |
| Material | Die-cast Aluminium, Corrosion Resistant Surface ———————————————————————————————————— | | | |
| | Aluminium Reflector, PC Clear Diffuser | | | |
| Dimensions | Length: 600mm; Width: 600mm; Height: 70mm Spigot Dia: 60mm; Spigot Depth: 76mm | | | |
| Details | 3000/4000/5000/6000K available, CRI>80, 85-95 Luminaire Luminous Flux per Watt @ 4000K | | | |
| IP Rating | IP65 | | | |
| IK Rating | IK08 | | | |
| Installation | Pole Top Mounted | | | |
| Driver | Integral LED Driver | | | |



ORDER CODE


AW9214P-(Colour Finish)-(Wattage)-(Temperature)-(Optics)-(Mounting)

Example: Example: AW9214P-GR-40-3K-T01V-PT4000mm

Options:

| Colour Finish | Wattage | Temperature | Optics | Mounting |
|---------------|---------|-------------|--------|-----------------------------|
| GR (Grey) | 30 | 3K (3000K) | T01H | PT (Pole Top) Add Height |
| BK (Black) | 40 | 4K (4000K) | T01V | |
| | 60 | 5K (5000K) | | |
| | 80 | 6K (6500K) | | |


Dimensions Line Diagram:




TECHNICAL INFORMATION

Photometrics:

T-01V

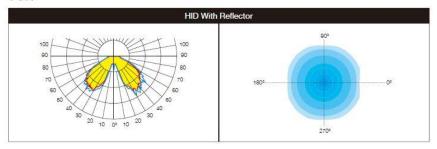

T-01H

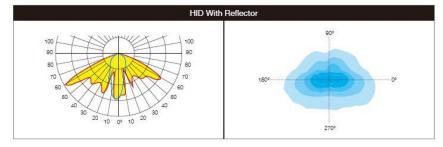

Application Photos:



