

### AW9308FL Varos S







### **Application Description:**

- Surface Mounted, Fixed
- Internal or External Locations, High Light Output Requirement
- Carparks, Carpark Entries, Loading Docks, Hangars, Warehouses, Sports Halls and High Ceiling Applications

<b>Product Name</b>	VAROS S
Description	High Powered, Vandal Resistant, Weatherproof, Ceiling Mounted, Rectangular, Low and High Bay, Fixed LED Floodlight Luminaire
Material  Dimensions	Die-cast Aluminium Body & Frame with Anti-Ageing Powder coat, Pre-treated for External Use, Anti-corrosion and UV Resistant Coating, Tempered Clear Glass Diffuser 555 x 280mm; Height: 200mm
LED Details	60W / 80W / 100W / 120W / 150W SMD LED, CRI>80, Narrow or Wide Optic Beam, 6,000-15,000 Luminaire Luminous Flux @ 4000K
IP Rating IK Rating Installation Driver	IP66 IK09 Surface Mounted Integral LED Driver

LIGHTING

# **ORDER CODE**


AW9308FL-(Colour Finish)-(Temperature)-(Optics)-(Dimming)

Example: AW9308FL-GR-4K-T1-ND

# **Options:**

Colour Finish	Temperature	Optics	Dimming
GR (Grey)	3K (3000K)	T1 (Symmetric)	ND (Non-Dim)
BK (Black)	4K (4000K)	T2A (Asymmetric)	DD (DALI)
	5K (5000K)	T3A (Asymmetric)	
	6K (6000K)		


# **Dimensions Line Diagram:**





### **TECHNICAL INFORMATION**

### **Photometrics:**

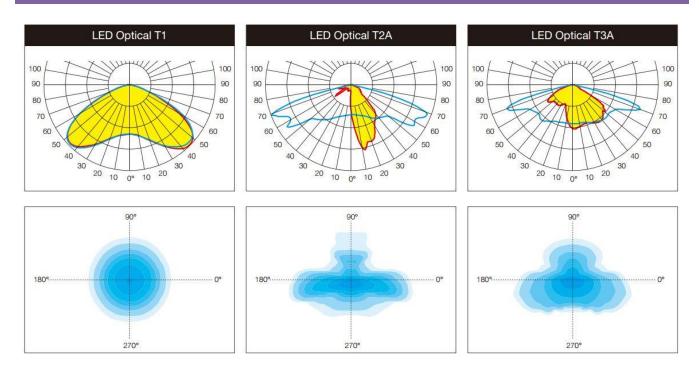

# **Product Application Photo:**

