


## TECHNICAL INFORMATION

### AW9659-2PT Circa 3000



Suspended  
Fixed

#### Application Description:

- Suspended, Fixed
- Interior Areas; Architectural High Lux Requirements
- Residential Living, Commercial Offices, Retail and Hospitality, Shopping Centers Boardrooms, Building Entry Foyers and Sitting Areas, Educational Schools/Libraries/Universities, Applications

<b>Product Name</b>	<b>CIRCA 3000</b>
<b>Description</b>	Suspended Architectural Styled Circular Ring LED Pendant, Up and/or Down Lighting Options
<b>Material</b>	Metallic Diecast Aluminium Trim and Body with Acrylic Diffuser and Wire Suspension Cables
<b>Dimensions</b>	Diameter: 3000mm; Height: 100mm
<b>Driver</b>	Inbuilt LED Driver
<b>Details</b>	240W SMD LED, 2700K/3000K/4000K/6500K, CRI>80, 20,400 Luminaire Luminous Flux @ 3000K
<b>IP Rating</b>	IP20
<b>Installation</b>	Suspended

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwellighting.com.au](mailto:sales@actwellighting.com.au)  
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwellighting.com](http://www.actwellighting.com)

## TECHNICAL INFORMATION

### ORDER CODE


AW9659-2PT-(Colour Finish)-(Temperature)-(Dimming)

Example: AW9659-2PT-WH-3K-ND


### Options:

Colour Finish	Temperature	Dimming
WH (White)	2.7K (2700K)	ND (Non-Dim)
BK (Black)	3K (3000K)	
SL (Silver)	4K (4000K)	
RAL (Custom Colours)	6.5K (6500K)	

### Dimensions Line Diagram:

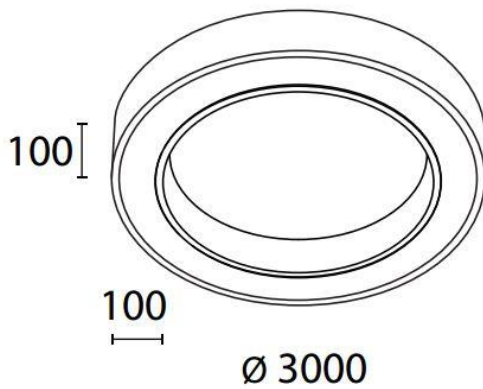

### Photometrics:

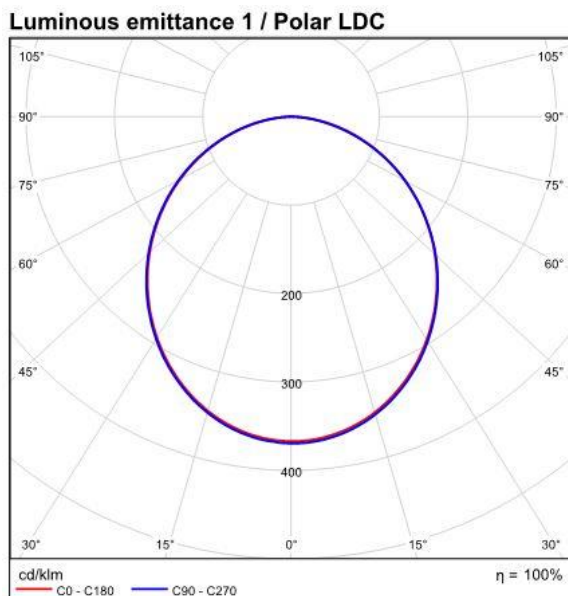

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: [sales@actwellighting.com.au](mailto:sales@actwellighting.com.au)

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | [www.actwellighting.com](http://www.actwellighting.com)

## TECHNICAL INFORMATION

### Product Application Photos:

---

