


AW9661PT Grigio 94



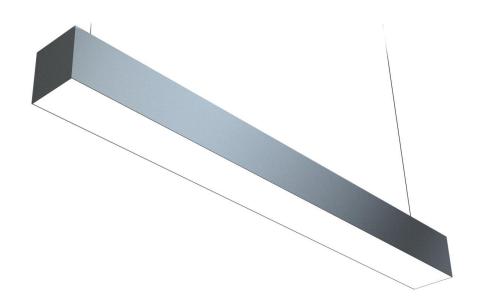

suspena Fixed

Application Description:

- Suspended, Fixed
- Internal Areas; Linear Lighting with Even Distribution Requirements
- Commercial Offices, Work Stations, Reception Desks, Schools and Universities, Halls and Theatres, Kitchen Islands, Meeting and Board Rooms, Gallery and Showroom Applications

Product Name	GRIGIO 94
Description	Linear Bar, Suspended, Low Glare Anti-Brittle Diffuser, LED Luminaire with Integral LED Driver
Material	Pure Aluminium Extrusion, Glare Protective Frosted Acrylic Diffuser
Dimensions	Width: 94mm; Height: 94mm
Driver Details	Integral LED Driver SMD LED Boards, 3000K, 3500K or 4000K available, RGB/RGBW Options, CRI>80/90, UGR<19 10W per metre (880 Luminaire Luminous Flux @ 3000K) 20W per metre (1700 Luminaire Luminous Flux @ 3000K) 30W per metre (2600 Luminaire Luminous Flux @ 3000K)
IP Rating IK Rating Installation	IP20 IK05 Suspended



ORDER CODE


AW9661PT-(Colour Finish)-(Length)-(Temperature)-(CRI)-(Dimming)

Example: AW9661PT-WH-3250-3K-80-ND


Options:

Colour Finish	Wattage	Light Con	Length	Temperature	CRI	Dimming
WH (White)	10 (10w/m)	DO (Down Only)	(in mm)	3K (3000K)	80 (CRI>80)	ND (Non-Dim)
AL (Aluminium)	20 (20w/m)	UD (Up & Down)		3.5K (3500K)	90 (CRI>90)	11 (1-10V)
BK (Black)	30 (30w/m)			4K (4000K)		DD (DALI)
CUSTOM				RGB		
				RGBW		

Dimensions Line Diagram:



Photometrics:



TECHNICAL INFORMATION

LIGHTING

Product Application Photos:



