


TECHNICAL INFORMATION

AW9662PT Grigio IP

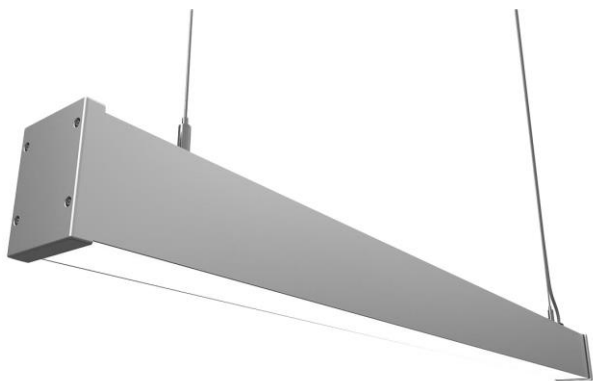

Surface mounted /
Suspended Fixed

Application Description:

- Surface Mounted or Suspended Fixed
- Internal or External Areas; High Weatherproof and Linear Even Distribution Requirements
- Commercial Offices, Storages and Warehouses, Educational and Medical Facilities, Retail and Hospitality, Walkways and Corridors, Carparks, Public Amenities, Transport Facilities, Airport Applications

Product Name	GRIGIO IP
Description	Weatherproof, Linear Bar, Suspended, Low Glare, Anti-Brittle Diffuser, LED Luminaire with Integral LED Driver
Material	Pure Aluminium Extrusion, Glare Protective Frosted Acrylic Diffuser, Silicon Sealed End Caps
Dimensions	Length: Custom Up & Down: 117 x 63mm; Down Only: 84 x 63mm;
Driver	Integral LED Driver
Details	10/20/30W/m, 2700K/3000K/4000K/5000K/6500K available, CRI>80/90, IP65, IK08, UGR<19, 770/1500/2300 Luminaire Luminous Flux per metre @ 4000K
IP Rating	IP65
IK Rating	IK08
Installation	Surface Mounted / Suspended with Wire or with T-Bracket

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com

TECHNICAL INFORMATION


ORDER CODE

AW9662PT-(Colour Finish)-(Wattage)-(Light Config)-(Length)-(Temperature)-(Mounting)-(Dimming)
Example: AW9662PT-WH-20-DO-5200mm-3K-SM-ND


Options:

Colour Finish	Wattage	Light Config.	Length (in mm)	Temperature	Mounting	Dimming
WH (White)	10 (10w/m)	DO (Down Only)		2.7K (3000K)	SM (Surface Mount)	ND (Non-Dim)
SL (Silver)	20 (20w/m)	UD (Up & Down)		3K (3000K)	SS (Suspended)	11 (1-10V)
BK (Black)	30 (30w/m)			4K (4000K)		DD (DALI)
RAL (Custom)				5K (5000K)		RL (RAL)
				6.5K (6500K)		

Dimensions Line Diagram:

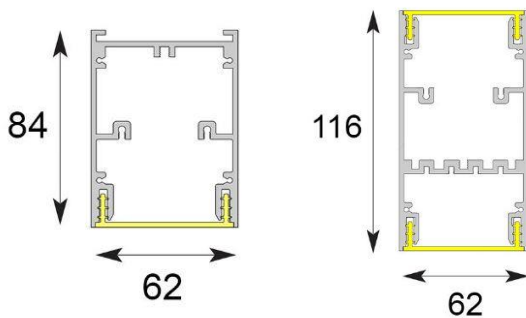

Photometrics:

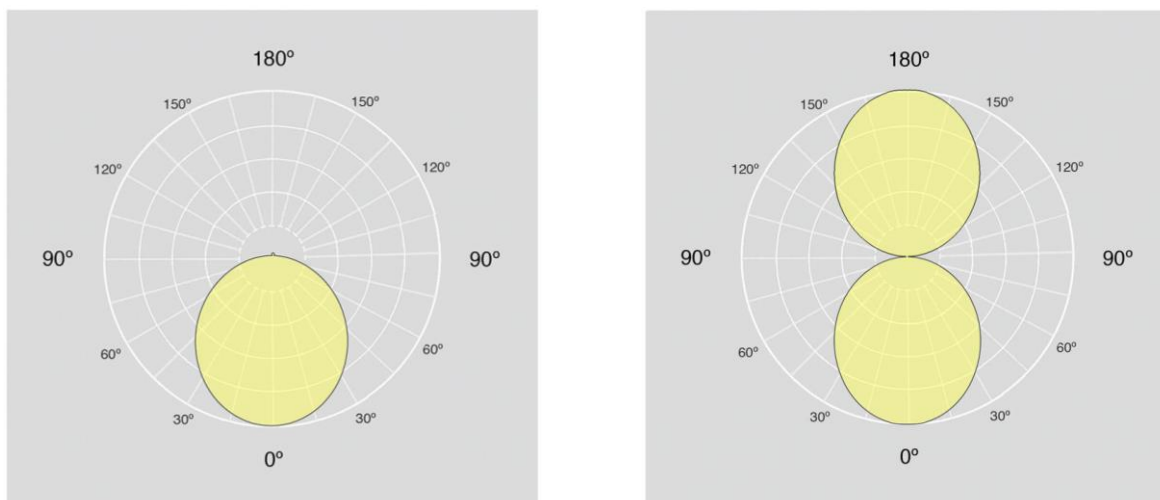


We reserve the right to make technical changes.


Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com

TECHNICAL INFORMATION

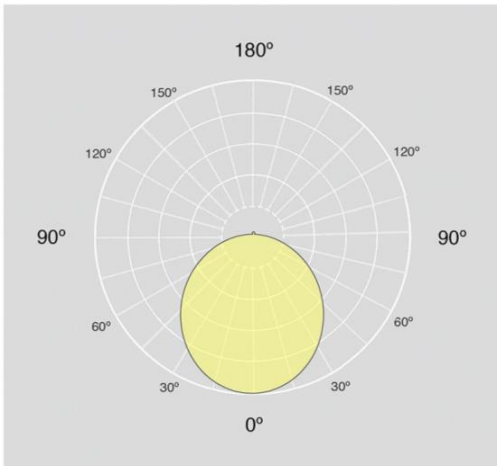

Production Application Photos:

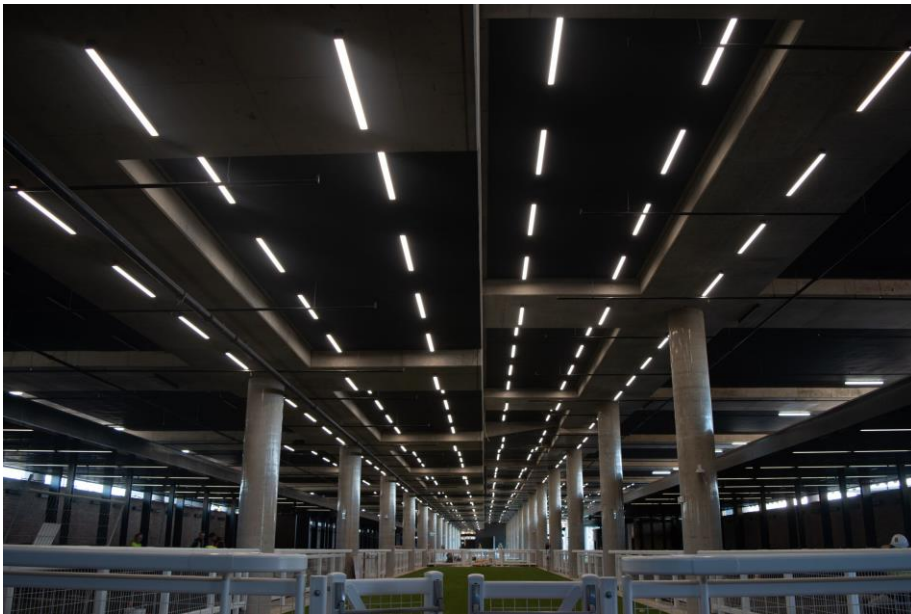

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com