AWS1515MTTC Edge

Surface Mounted
Fixed

Application Description:

- Surface Mounted, Fixed
- Internal Areas; Linear Asymmetric Forward Throw Requirement
- Residential Living, Kitchen and Bathroom Cabinetries, Retail Displays, Ceiling Soffits, Under Table or Seating Lighting, Wall Indenting, Linear Backlighting, Step Treads Linear Lighting Applications

Product Name	EDGE
Description	Cornice Application Linear Extrusion, Utilising SMD LED Tape, Frosted Acrylic Diffuser, 24V, Available with Aluminium Mounting Clips, Custom Cut to Length
Material	Extruded Pure Aluminium Channel, Frosted Acrylic Diffuser, Aluminium Mounting Clips
Dimensions	Length: 17x17 mm; Allowance for Clip: 19mm x 19mm
Driver Details	Remote 24V LED Driver 10W/m or 18W/m SMD LED, 3000K/4000K/RGB Available, CRI>80, Beam Angle: 120°, 1140 or 1800 Luminaire Luminous Flux per metre @ 3000K
IP Rating	IP44
IK Rating	IK05
Installation	Surface Mounted

ORDER CODE

AWS1515MTTC-(Length)-(Wattage)-(Temperature)-(Dimming)

Example: AWS1515MTFC-10-800-3K-ND

Options:

Temperature	Wattage	Length	Dimming
3K (3000K)	10 (10w/m)	0.5m	ND (Non-Dim)
4K (4000K)	18 (18w/m)	1m	11 (1-10V Dim)
RGB (RGB)		1.5m	DD (DALI Dim)
		2.0m	
		Custom (per 50 mm)	

Dimensions Line Diagram:

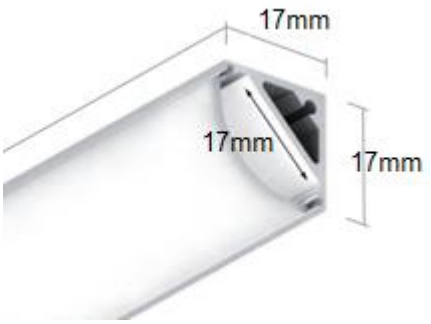

Photometrics:

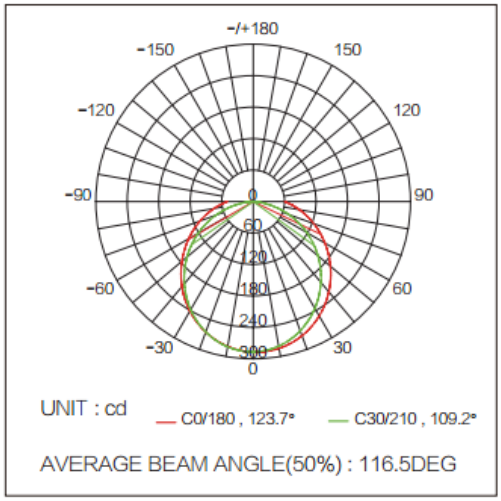

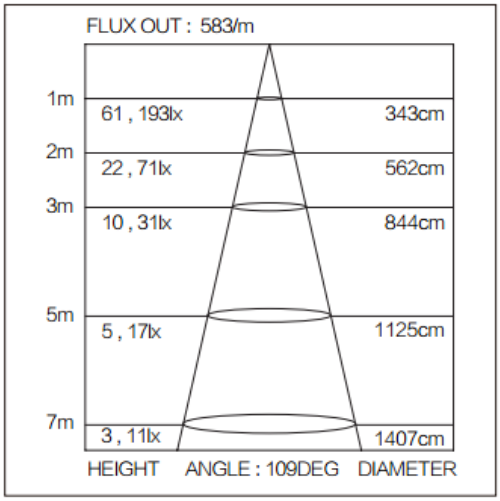

Parts:

End cap x 4

Mounting clip x 8

Product Application Photos: