


ACTWELL

LIGHTING

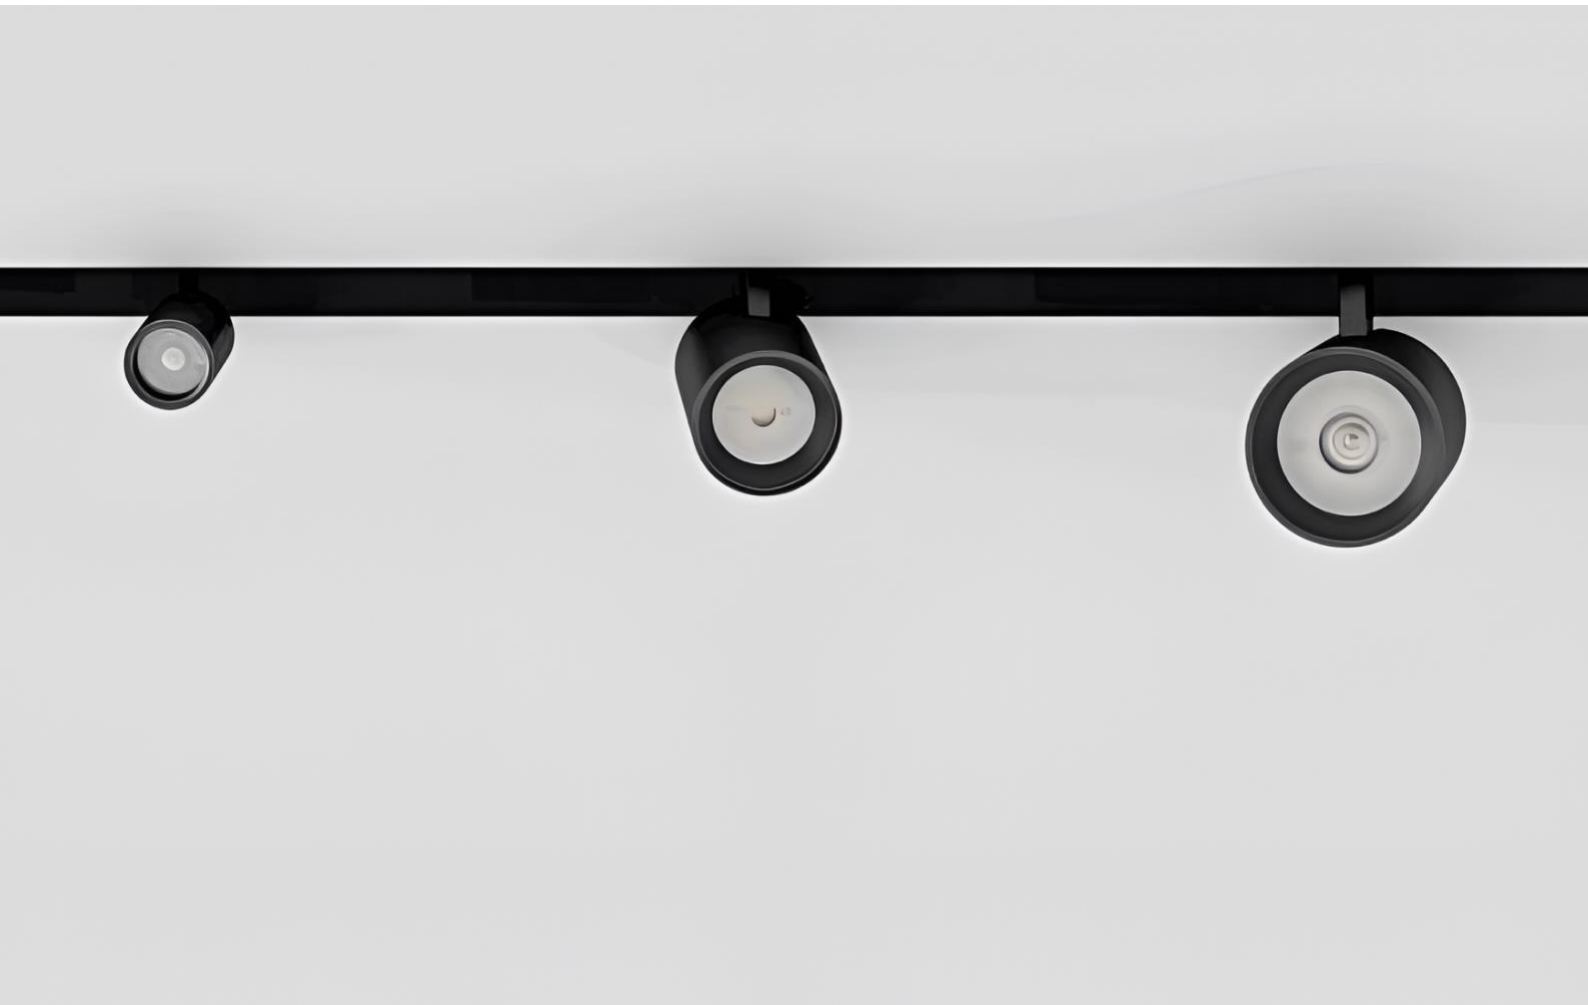

TECHNICAL INFORMATION

AW4151TR DUPONT BARREL

APPLICATION AREA



Commercial



Educational Facilities



Hospitality



Shopping Centers



Sports Centers




Residential



Retail



Galleries and Museums



Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalme NSW 2116 Australia



+61 2 9638 3333



enquiries@actwellighting.com.au

PRODUCT NAME	
DUPONT BARREL 6,12,25	
Description	The Dupont Barrel series offers a range of track light wattage options with specific degree beam angles. Mounted within a 48V magnetic track system, the Dupont track series offers flexibility and modification suitable for diverse applications.
Materials	Die Cast Aluminium Alloy Body and Trim, PVC Track Insert Clear Tempered Glass Diffuser
Dimensions	6W - Diameter: 35mm; Length: 85mm 12W - Diameter: 55mm; Length: 125mm 25W - Diameter: 75mm; Length: 145mm
Driver	Remote 48V LED Driver
Luminaire Details	6W/12W/25W Options, 2700K/3000K/4000K Available, CRI>90, Beam Angle: 12°/24°/36°, SDCM<3, 105 Lumens Per Watt, 90 Luminaire Luminous Flux per Watt at 3000K 36°
Ratings	IP20
Rated Life	5yr Warranty LM80 B10: 68,000 hrs <i>Environmental Impact: Luminaire > 95% Recyclable, Fitting Under Actwell Revitalisation Program to Refit Parts to End Waste</i>
Installation	Track Mounted

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

ORDER CODE

AW4151TR- (Colour Finish)-(Wattage)-(Temperature)-(Beam Angle)-(Dimming)


Example: AW4151TR-WH-12W-3K-24°-ND

All Track Configurations to be Provided for Design and Quotation

OPTIONS

Colour Finish	Wattage	Temperature	Beam Angle	Dimming
WH (White)	6W	2.7K (2700K)	12°	ND (Non-Dim)
BK (Black)	12W	3K (3000K)	24°	DD (DALI-Dim)
	25W	4K (4000K)	36°	CS (Casambi)

DIMENSION LINE DIAGRAM

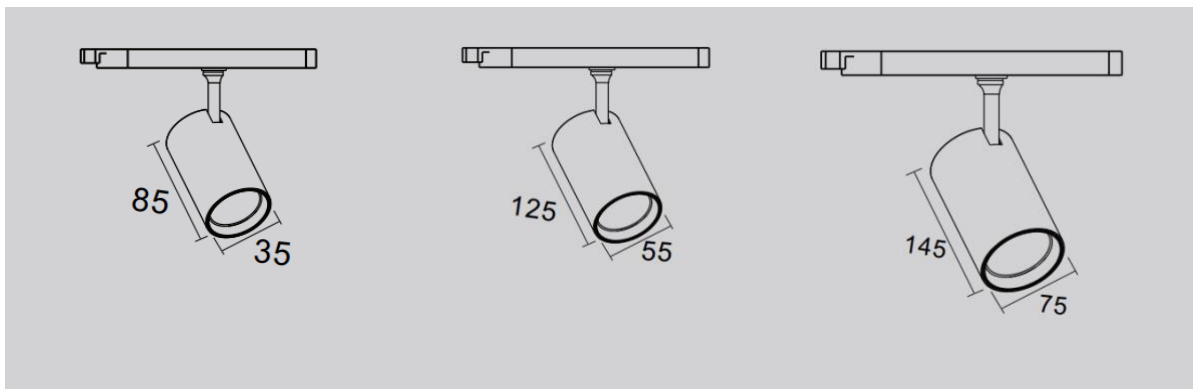








6W

12W

25W


Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

TRACK MOUNT OPTIONS

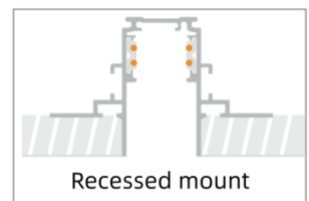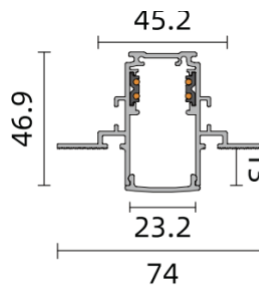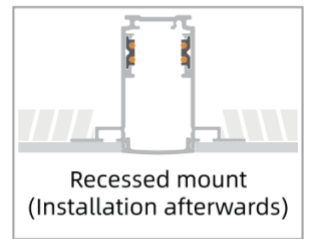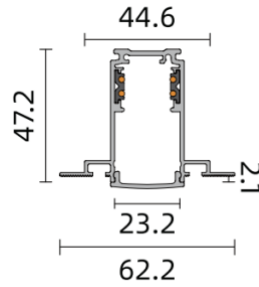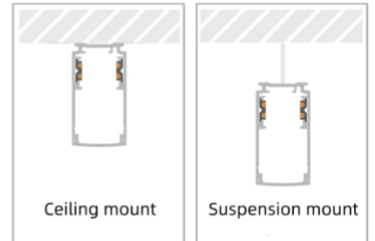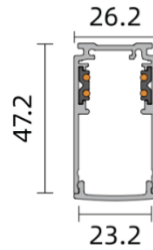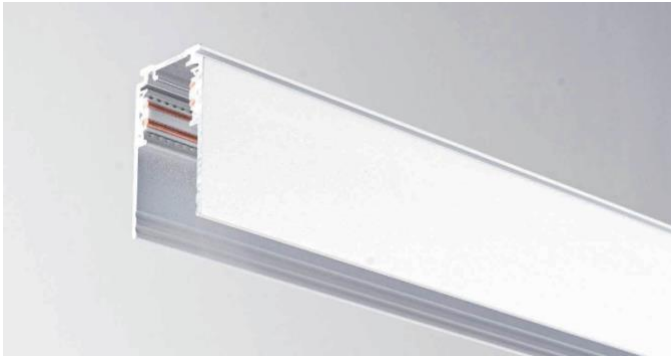


Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

TRACK PARTS

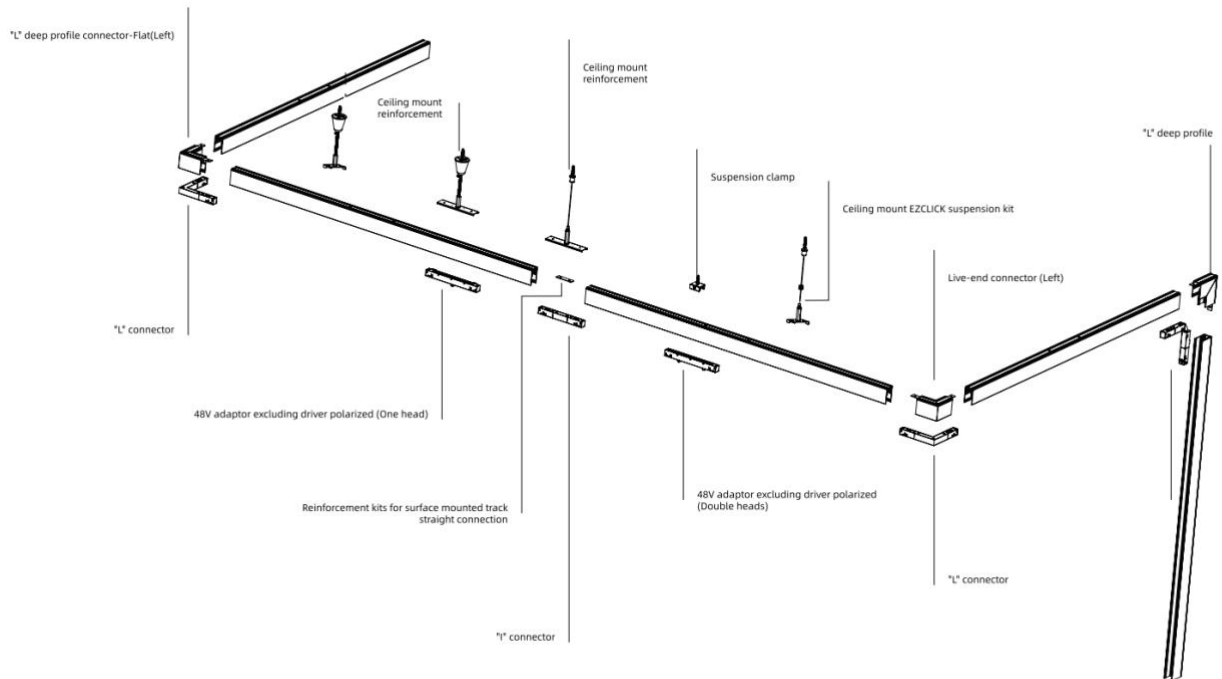


Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

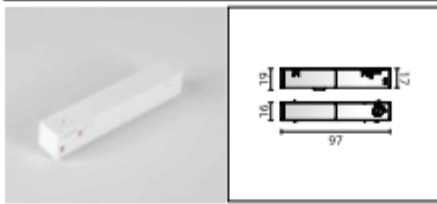


Live-end connector(Left)




Flexible connector

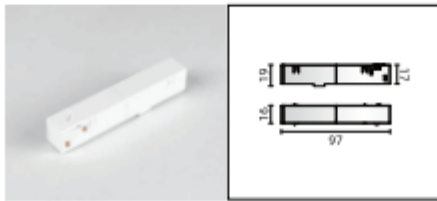


Live-end connector(Right)

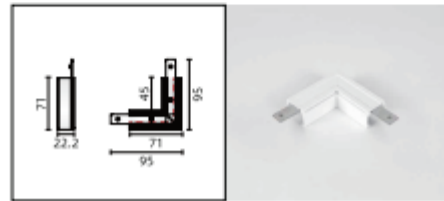


"L" Profile connector-Flat(Left)

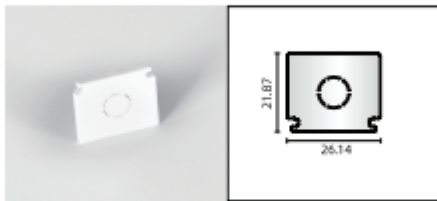

End cap

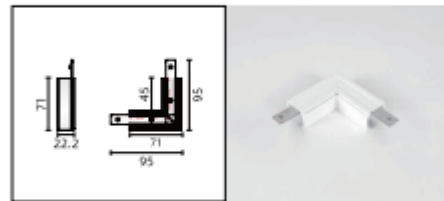


"L" Profile connector-Flat(Right)

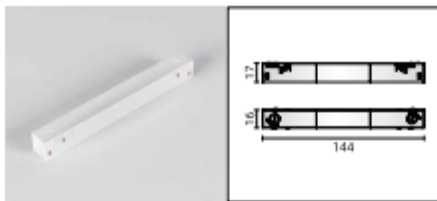


"I" connector



"L" Profile connector-Stereo

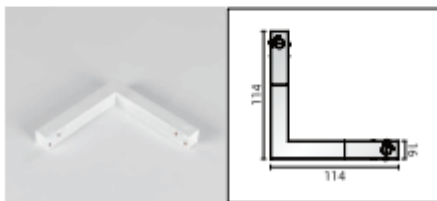


"L" connector

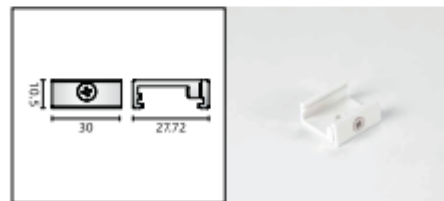


Suspension clamp

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative




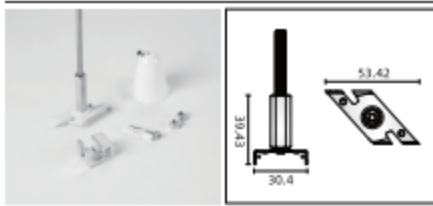


Ceiling mount, EZCLICK suspension kit with 1m rod

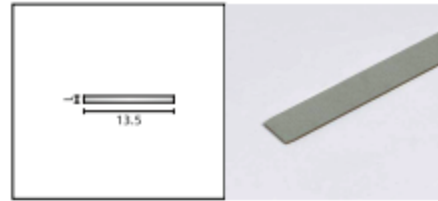

Metal strip (880mm)

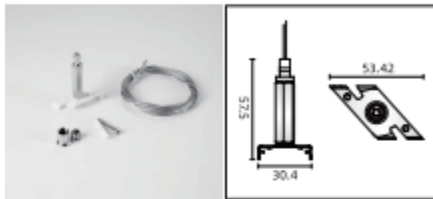

Ceiling mount, EZCLICK suspension kit with 1.5m wire

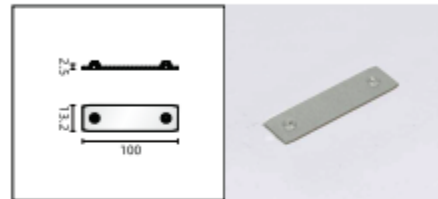

Reinforcement kit for surface mounted track straight connection



Ceiling mount reinforcement kit with 1m rod





Ceiling mount reinforcement kit with 1.5m wire



Track cover strip

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

PRODUCT APPLICATION PHOTOS

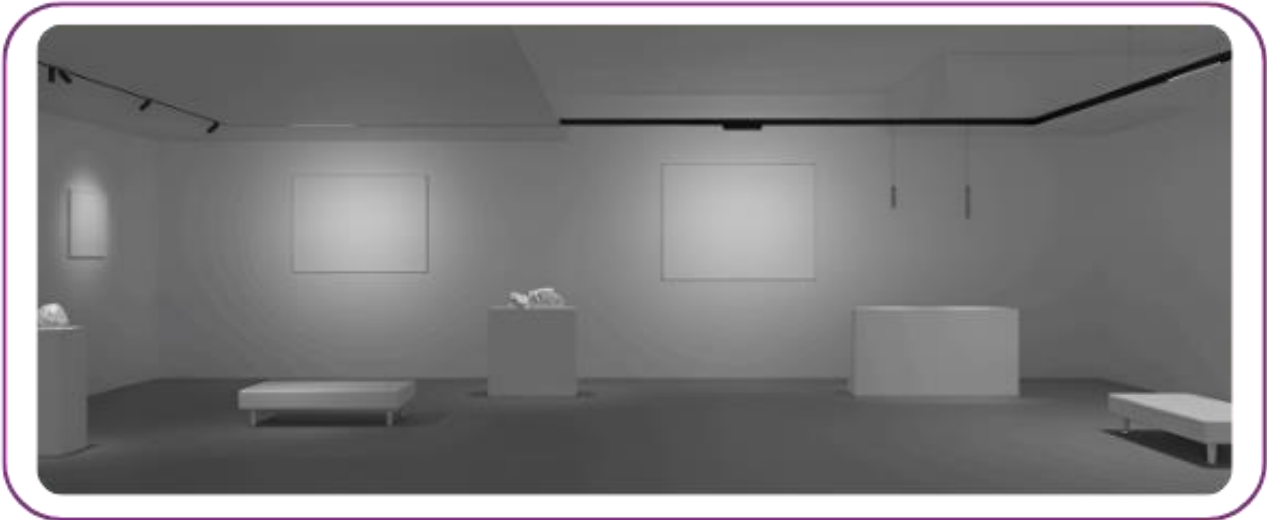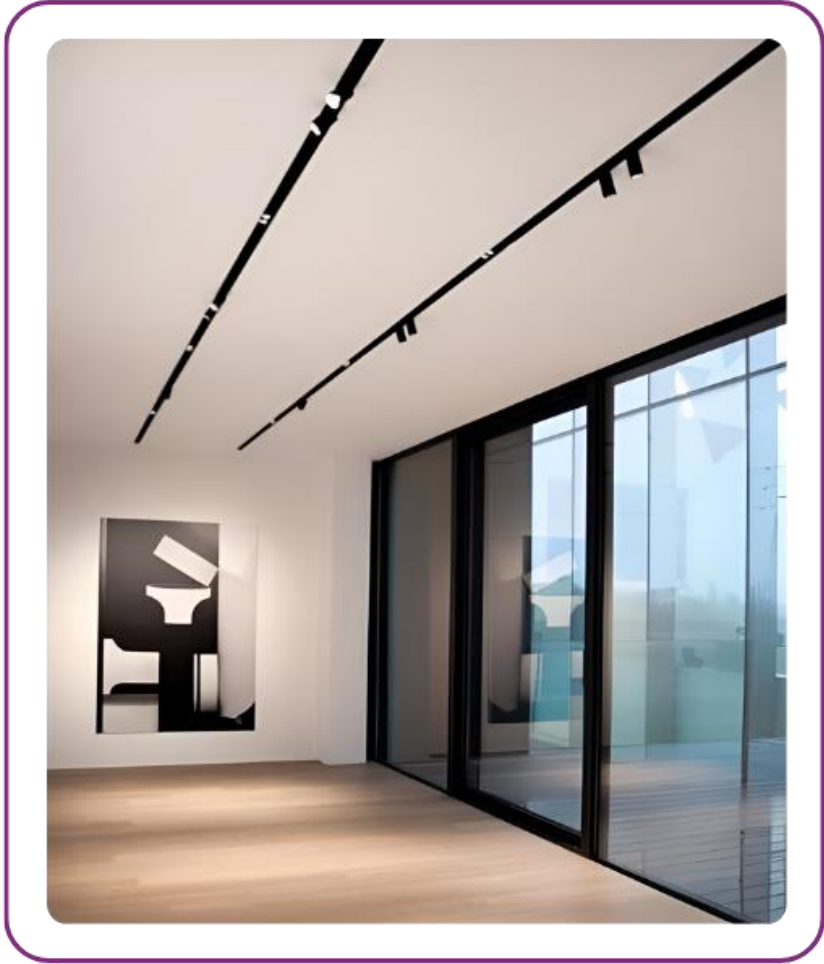

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative