


ACTWELL

LIGHTING

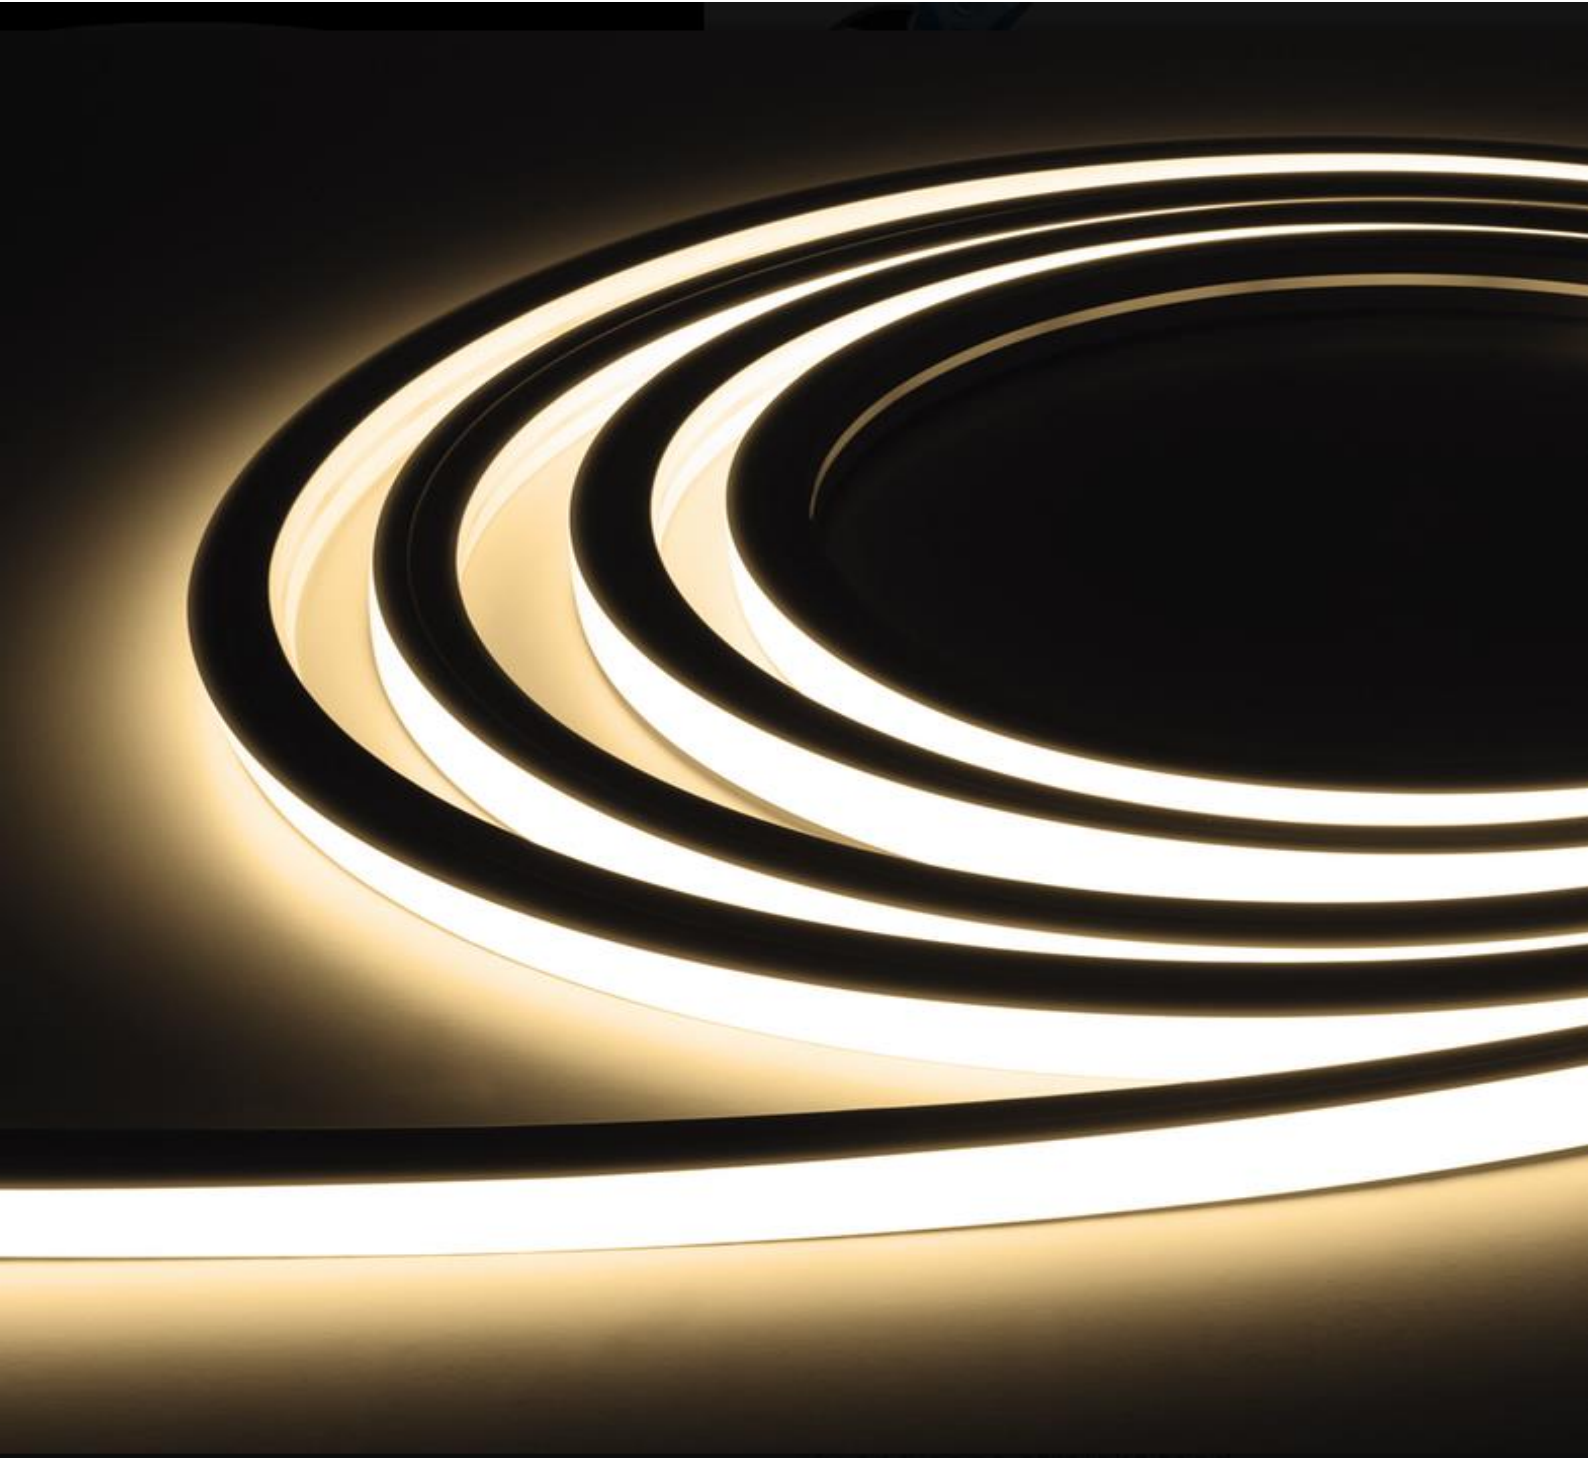

TECHNICAL INFORMATION

**AW5001LB GENIEFLEX 1617 TOPVIEW
THEATRE**

APPLICATION AREA



Corridors



Hospitality



Hotels



Retail



Commercial



Pools



Ceiling Soffits



Under Handrails



Landscaping



Galleries and Museums



Hospital and Medical



Residential



Shopping Centers




Sports Centers



Educational Facilities



Theatre Lighting



Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwellighting.com.au

PRODUCT NAME

GENIEFLEX 1617 TOPVIEW THEATRE

Description	Black Diffused and Jacketed Flexible Neon for Low Light and Low Glare Applications, Universal Bending Flat Diffuser, Seamless and Non-Dotting, Corrosion/Solvents/Flame/ UV Resistant Option, LED Ribbon
Materials	Flexible PVC Body, Injection Moulded Caps and Connectors, Aluminium/Plastic Locking Clip/Channel, UV Resistant Spray Coating
Dimensions	Width: 16mm, Height: 16mm, Length: Max 10m per run (Allowance for Clip: 21mm Width, 22.5mm Height)
Driver	24V Constant Voltage Remote Driver
Luminaire Details	7W/m or 10W/m SMD LED, Beam Angle: 115°, CRI>90, SDCM<3, UGR<16, 650 Lumens, 15 Luminaire Luminous Flux per meter at 3000K 10W/m.
Ratings	IP66, IP67, IP68 IK08
Rated Life	5yr Warranty L80 B10: 72,000hrs
Installation	Surface or Recessed within Mounting Clips or Channels

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwelllighting.com.au

ORDER CODE


AW5001LB-(Temperature)-(Length)-(Wattage)-(IP Rating)-(Cable Input)-(Dimming)-(Clips)

Example: AW5001LB-3K-8340-10W-IP66-End-ND-AL(6x) +AC(20x)

OPTIONS


Temperature	Wall to Wall Length	Wattage	IP	Cable Input	Dimming	Clips (Advise Qty)
2.7K (2700K)	Standard Rolls 10m Roll Cut Lengths Single Colour 62.5mm	7W	IP66	End (Cable Enters End)	ND (Non-Dim)	AC (Aluminium 35mm)
3K (3000K)		10W	IP67	Side L (Cable Entry Left)	DD (DALI-Dim)	AL (Aluminium 1000mm)
4K (4000K)			IP68	Side R (Cable Entry Right)	DX (DMX)	AP (Plastic 1000mm)
6K (6000K)				Bottom (Cable Entry Below)	DS (DSI)	FX (Flexible 500mm)
					11 (1-10V)	

DIMENSION LINE DIAGRAM



Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

PHOTOMETRICS

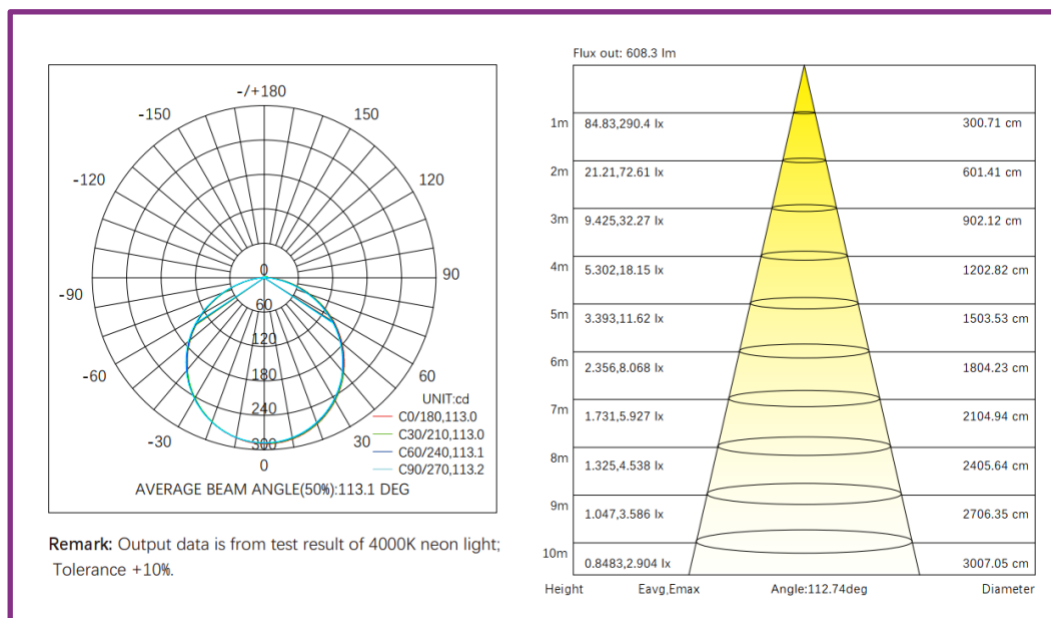

FEATURES AND OPTIONS



Beam Angle



Bending Diameter



Flame Resistant



UV Resistant



Solvents Resistant



Saltwater Resistant



IP 68 Protection



IK08 Protection

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwelllighting.com.au

CLIP OPTIONS



AW5001P-AL
1m Aluminium Channel

Dimensions: L1000mm W21.2mm H19mm



AW5001P-AC
Aluminium Clip

Dimensions: L35mm W21.2mm H19mm



AW5001P-FX
Flexible Clip

Dimension: L500mm W16.7mm H17.4mm

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333




enquiries@actwelllighting.com.au


CABLE ENTRY OPTIONS



Bottom Cable Entry




End Cable Entry



Side Cable Entry

LINEAR LIGHTS

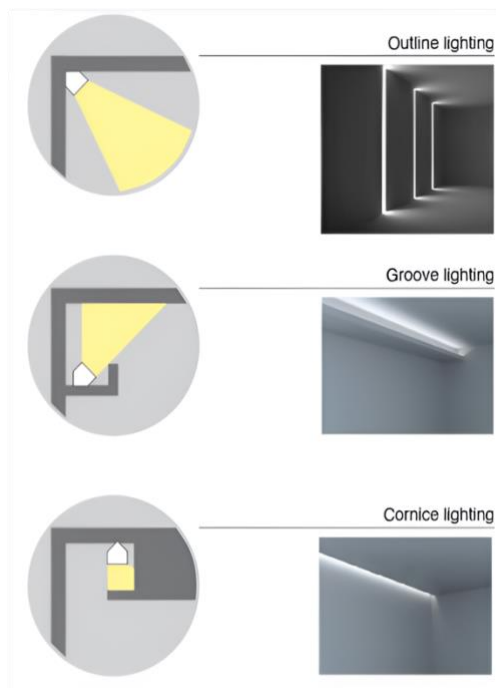

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

PRODUCT APPLICATION PHOTOS



Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



V1

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwelllighting.com.au