

ACTWELL

LIGHTING



TECHNICAL INFORMATION
AW6329-2EW ROYALE L DOWN

APPLICATION AREA



Commercial



Educational Facilities



Hospitals



Hospitality



Residential



Hotels



Retail



Residential - Wet Area



Corridors



Shopping Centers



Aged Care



Child Care Centers



Building Wall Perimeters



Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwellighting.com.au

PRODUCT NAME	
ROYALE L DOWN	
Description	Exterior, Cylindrical Down Only, Weatherproof, Wall Mounted Vandal Resistant, High Corrosion Resistance, Deep Baffle Anti-Glare, Fixed Interior and Exterior Areas. Weatherproof Areas. Colour Finish Options Available
Material	Die-Cast Aluminium Body & Frame with Anti-Ageing Powder coat and Pre-treated for External Use, PC reflector, Clear Tempered Glass Cover
Dimension	Diameter: 125mm; Height: 240mm; Projection: 164mm
Driver	Integral LED Driver Remote DALI Driver
Luminaire Details	20W COB LED, 3000K/4000K Available, CRI>90, Beam Angle: 23°/38°/60°, SDCM<3, UGR<19, 2900 Lumens, 2490 Luminaire Luminous Flux at 3000K 60°. Lumen Efficacy: 145Lm/W.
Ratings	IP65 IK08
Rated Life	5yr Warranty LM80 B10: 72,000 hrs <i>Environmental Impact: Luminaire > 95% Recyclable, Fitting Under Actwell Revitalisation Program to Refit Parts to End Waste</i>
Installation	Wall Mounted

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

ORDER CODE


AW6329-2EW-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW6329-2EW-BK-3K-23°-ND

OPTIONS

Colour Finish	Temperature	Beam Angle	Dimming
BK (Black)	3K (3000K)	23°	ND (Non-Dim)
WH (White)	4K (4000K)	38°	DD (DALI-Dim)
SG (Sand Grey)		60°	
SB (Sand Brown)			

DIMENSION LINE DIAGRAM

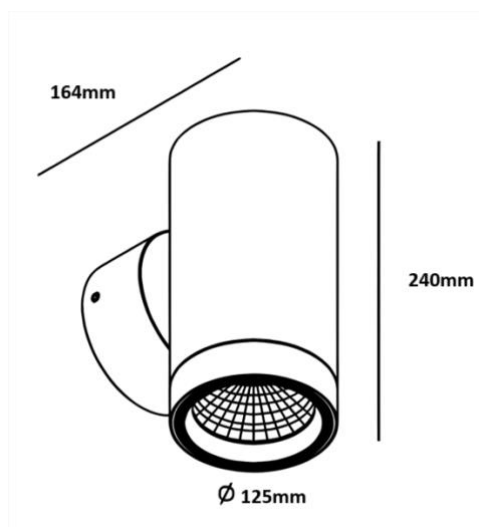

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

PRODUCT APPLICATION PHOTOS

