

**A**CTWELL

LIGHTING



TECHNICAL INFORMATION  
**AW68-1RD ISOPOD**

APPLICATION AREA



Aged Care



Child Care



Commercial



Educational Facilities



Hospitality



Hospital and Medical



Hotels



Infrastructure



Retail



Shopping Centers



Residential



Sports Centers



Galleries and Museums



Restrooms



Theatres



Wet Area



Actwell Trading reserves the right to make revisions and updates.  
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade  
Rydalmere NSW 2116 Australia



+61 2 9638 3333



[enquiries@actwellighting.com.au](mailto:enquiries@actwellighting.com.au)

PRODUCT NAME	
ISOPOD	
<b>Description</b>	IP65 Water Resistant and Dust Proof, Low Profile, Fixed, Recessed, LED Downlight Luminaire  Internal/External Areas: High Dust and Waterproofing, Low Glare Applications
<b>Material</b>	Die-Cast Aluminium Body and Trim, Anti-Rust Powder Coating, Clear Glass Diffuser, Steel Spring Mounting Clips
<b>Dimension</b>	Diameter: 87mm; Height: 44mm; Cut Out: 80mm
<b>Driver</b>	225mA Remote LED Driver
<b>Luminaire Details</b>	10W COB LED, 2700K/3000K/35000K/4000K/5000K Available, CRI>90, Beam Angle: 15°/24°/36°/60°, SDCM<3, UGR<19, 1200 Lumens, 980 Luminaire Luminous Flux at 3000K.  Lumen Efficacy: 120lm/W.
<b>Ratings</b>	IP65 LED Module   IC-4   IK05
<b>Rated Life</b>	5yr Warranty   LM80 B10: 63,000 hrs  <i>Environmental Impact: Luminaire &gt; 95% Recyclable, Fitting Under Actwell Revitalisation Program to Refit Parts to End Waste</i>
<b>Installation</b>	Recessed

Actwell Trading reserves the right to make revisions and updates.  
If you have any enquiries please consult an Actwell Lighting Representative

ORDER CODE


AW68-1RD-(Colour Finish)-(Baffle Colour Finish)-(Temperature) -(Beam Angle)- (Dimming)

Example: AW68-1RD-WH-WH-3K-60°-DD

OPTIONS


Colour Finish	Baffle Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	WH (White)	2.7K (2700K)	15°	ND (Non-Dim)
BK (Black)	BK (Black)	3K (3000K)	24°	PH (Phase-Dim)
		3.5K (3500K)	36°	DD (DALI-Dim)
		4K (4000K)	60°	
		5K (5000K)		

DIMENSION LINE DIAGRAM

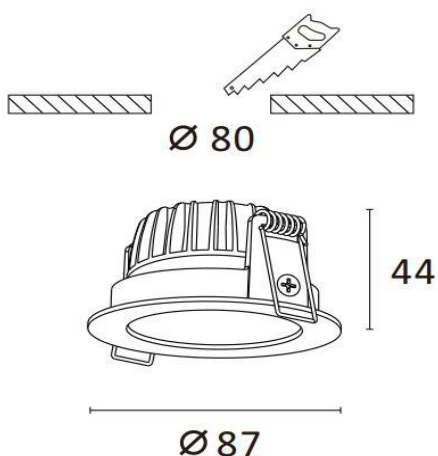

Actwell Trading reserves the right to make revisions and updates.  
If you have any enquiries please consult an Actwell Lighting Representative

PRODUCT APPLICATION PHOTOS

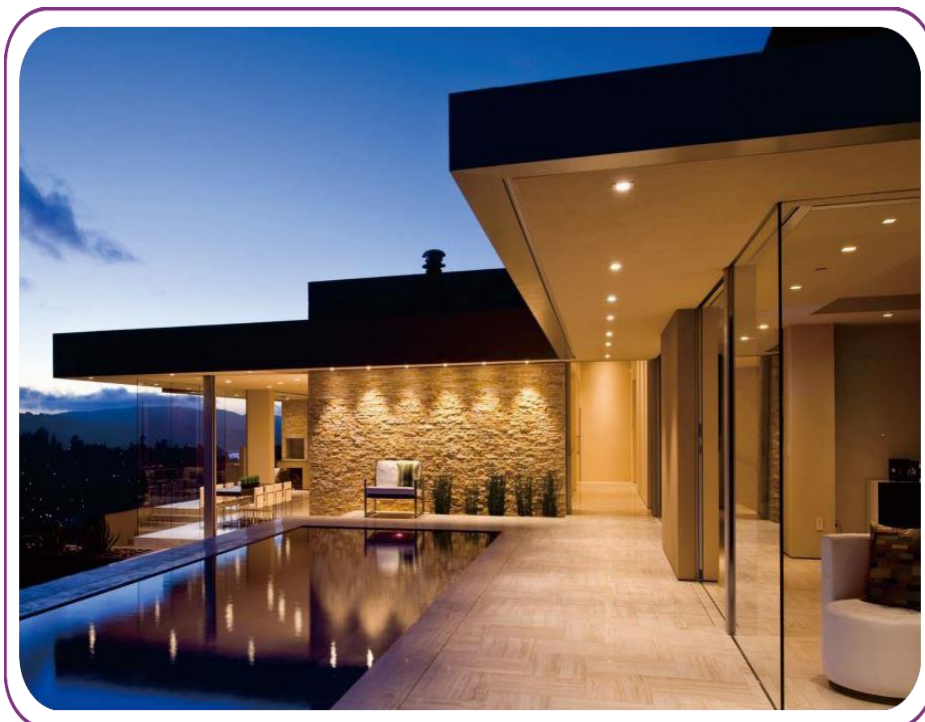

Actwell Trading reserves the right to make revisions and updates.  
If you have any enquiries please consult an Actwell Lighting Representative