

**A**CTWELL

---

**LIGHTING**

---



---

**TECHNICAL INFORMATION**  
**AW71-2RD TEMPEST 15**

APPLICATION AREA



Aged Care



Child Care



Commercial



Educational Facilities



Hospitality



Hospital and Medical



Hotels



Infrastructure



Retail



Shopping Centers



Residential



Sports Centers



Galleries and Museums



Library



Entry Foyer



Corridor



Celling Soffits



Transportation



Actwell Trading reserves the right to make revisions and updates.  
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade  
Rydalmere NSW 2116 Australia



+61 2 9638 3333



[enquiries@actwellighting.com.au](mailto:enquiries@actwellighting.com.au)

| PRODUCT NAME             |  |
|--------------------------|--|
| <b>TEMPEST 15</b>        |  |
| <b>Description</b>       | Architectural, Coloured Reflector, High Powered, High Uniformity, Anti-glare, Deep Baffle, Adjustable, Recessed LED Downlight with Trim<br><br>Interior Areas, Decorative and Low Glare Applications |
| <b>Material</b>          | Pure Aluminium Mounting Ring, Die-cast Aluminium Housing, Anti-glare Optic Diffuser  |
| <b>Dimension</b>         | Diameter: 110mm; Height: 122mm; Cut Out: 95mm  |
| <b>Driver</b>            | 350mA Remote LED Driver  |
| <b>Luminaire Details</b> | 15W COB LED, 2700K/3000K/3500K/4000K Available, CRI>90, Beam Angle: 15°/24°/36°/60°, SDCM<3, UGR<17, 2180 Lumens, 2075 Luminaire Luminous Flux at 3000K 36°. Lumen Efficacy: 137Lm/W                 |
| <b>Ratings</b>           | IP20   IC-4   IK05   |
| <b>Rated Life</b>        | 5yr Warranty   LM80 B10: 63,000 hrs<br><br><i>Environmental Impact: Luminaire &gt; 95% Recyclable, Fitting Under Actwell Revitalisation Program to Refit Parts to End Waste</i>                      |
| <b>Installation</b>      | Recessed   |

Actwell Trading reserves the right to make revisions and updates.  
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade  
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwelllighting.com.au

ORDER CODE

AW71-2RD-(Colour Finish)-(Reflector)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW71-2RD-WH-GD-3K-24°-ND

OPTIONS


| Colour Finish | Reflector   | Temperature  | Beam Angle | Dimming        |
|---------------|-------------|--------------|------------|----------------|
| WH (White)    | WH (White)  | 2.7K (2700K) | 15°        | ND (Non-Dim)   |
| BK (Black)    | BK (Black)  | 3K (3000K)   | 24°        | PH (Phase-Dim) |
|               | SL (Silver) | 3.5K (3500K) | 38°        | DD (DALI-Dim)  |
|               | GD (Gold)   | 4K (4000K)   | 60°        |                |

BAFFLE OPTIONS



Actwell Trading reserves the right to make revisions and updates.  
If you have any enquiries please consult an Actwell Lighting Representative

**DIMENSION LINE DIAGRAM**

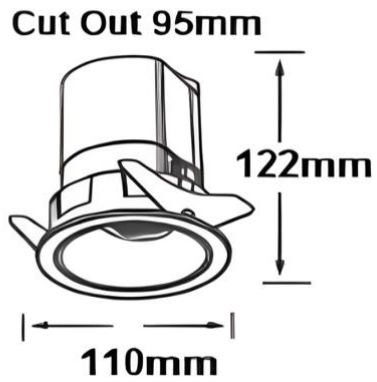

**PRODUCT APPLICATION PHOTOS**

