

TECHNICAL INFORMATION

AW908FL Varos R



Surface Mounted
Adjustable

Application Description:

- Surface Mounted, Fixed
- Internal or External Locations, High Light Output Requirement
- Carparks, Carpark Entries, Loading Docks, Hangars, Warehouses, Sports Halls and High Ceiling Applications

Product Name	VAROS R
Description	High Powered, Vandal Resistant, Weatherproof, Ceiling Mounted, Tiltable, Low/High Bay, LED Floodlight Luminaire
Material	Die-Cast Aluminium, Anodised Aluminium Reflector, Flat Tempered Glass Cover, Chemical Anti Corrosion and UV Resistant Paint Coating
Dimensions	Diameter: 450mm; Height: 165mm
LED Details	80W / 100W / 120W COB LED, CRI>80, Narrow or Wide Optic Beam, 40°/80° Degree Beam, 10,000-13,800 Luminaire Luminous Flux @ 4000K
IP Rating	IP65
IK Rating	IK09
Installation	Surface Mounted
Driver	Integral LED Driver

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com

TECHNICAL INFORMATION

ORDER CODE


AW908FL-(ColourFinish)-(Temperature)-(Beam Angle)-(Optics)-(Dimming)

Example: AW908FL-GR-4K-40°-T1-ND


Options:

Colour Finish	Temperature	Beam Angle	Optics	Dimming
GR (Grey)	3K (3000K)	40°	T1 (Narrow)	ND (Non-Dim)
BK (Black)	4K (4000K)	80°	T2 (Wide)	DD (DALI)
	5K (5000K)			
	6K (6000K)			

Dimensions Line Diagram:

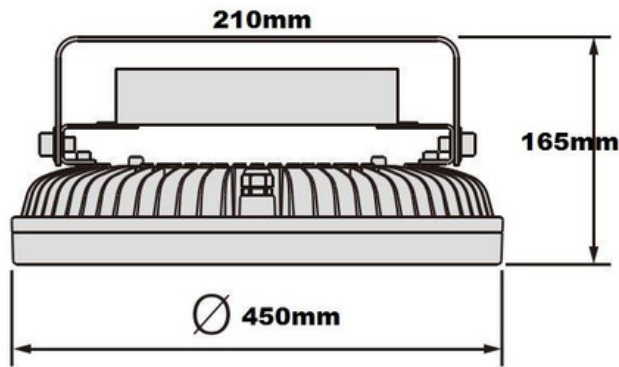

Photometrics:

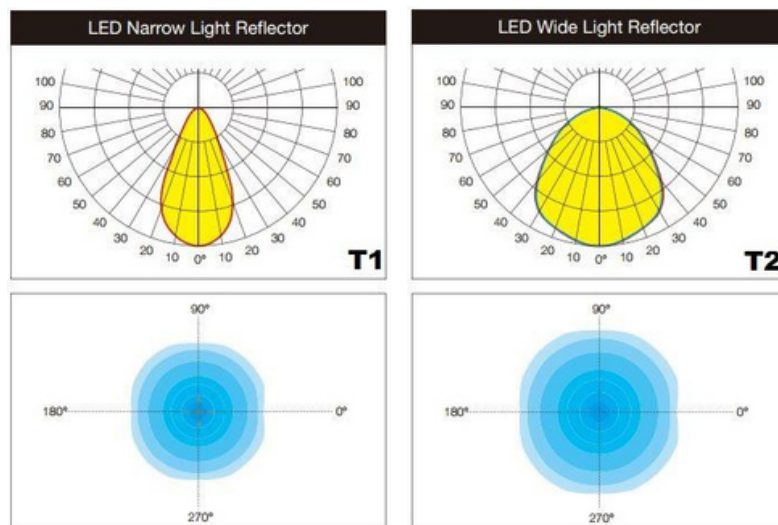

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com

Photometrics:



We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com