

ACTWELL

LIGHTING



TECHNICAL INFORMATION

AW587-1SD, AW587-2SD, AW587-3SD

ZVIKA SERIES

APPLICATION AREA



Commercial



Hospitality



Residential



Retail



Ceiling Soffits



Theatres



Aged Care



Galleries and Museums



Hotels



Shopping Centers



Hospitality



Educational Facilities



Child Care



Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwelllighting.com.au

PRODUCT NAME	
ZVIKA 15, ZVIKA 30, ZVIKA 40	
Description	Cylindrical, High Adjustability Surface Mounted Luminaire Series, Available Lens Options for Glare Control
Materials	Die Cast Aluminium Body and Base, Electrostatic Powder Coating, PMMA Antiglare Lens
Dimensions	AW587-1SD Diameter: 55mm; Barrel Length: 125mm AW587-2SD Diameter: 75mm; Barrel Length: 165mm AW587-3SD Diameter: 85mm; Barrel Length: 175mm
Driver	Integral Driver for Switch, Phase and DALI Dim Options
Details	2700K/3000K/4000K Options, Beam Angle 15°/35°/50°, CRI>90, SDCM<3, UGR<20. AW587-1SD 15W 1650 Lumens, 1450 Luminaire Luminous Flux at 3000K 35°, Lumen Efficacy: 113 lm/W AW587-2SD 30W 3300 Lumens, 3000 Luminaire Luminous Flux at 3000K 35°, Lumen Efficacy: 110 lm/W AW587-3SD 40W 4400 Lumens, 3680 Luminaire Luminous Flux at 3000K 35°, Lumen Efficacy: 110 lm/W
Ratings	IP20 IK05
Rated Life	5yr Warranty L80 B10: 72,000hrs Environmentally Sustainable Replaceable LED Module Environmental Impact: Luminaire > 95% Recyclable, Fitting Under Actwell Revitalisation Program to Refit Parts to End Waste
Installation	Surface Mounted

Actwell Trading reserves the right to make revisions and updates.
 If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
 Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwelllighting.com.au

ORDER CODE

AW587-1SD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)-(Accessories)

AW587-2SD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)-(Accessories)

AW587-3SD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)-(Accessories)

Example: AW587-1SD-WH-3K-35°-ND

OPTIONS

Colour Finish	Temperature	Beam Angle	Dimming	Accessories
WH (White)	2.7K (2700K)	15°	ND (Non-Dim)	Refer to Below
BK (Black)	3K (3000K)	35°	PH (Phase-Dim)	
	4K (4000K)	50°	DD (DALI-Dim)	

Accessories




Honeycomb

Glare Shield 1

Glare Shield 2

Snoot

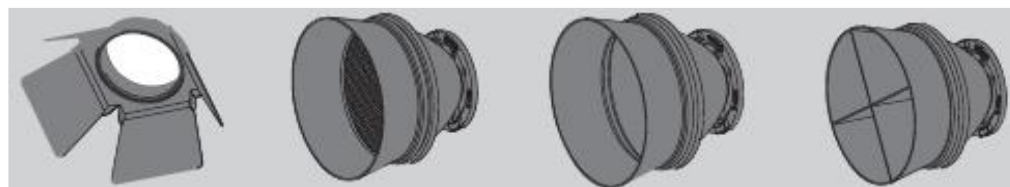

Theatre

Deep Honeycomb

Deep Adapter

Glare Cross Visor

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia




+61 2 9638 3333



enquiries@actwelllighting.com.au

DIMENSIONS LINE DIAGRAM

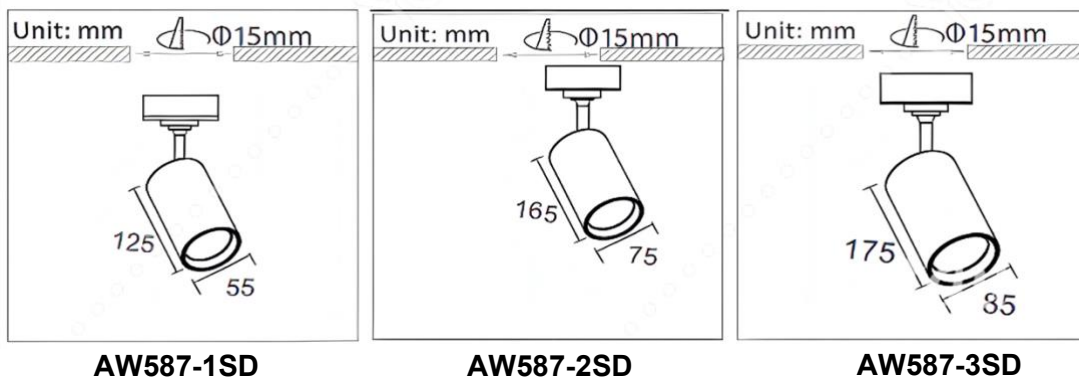

PRODUCT APPLICATION PHOTOS

