

TECHNICAL INFORMATION

AW5050IPC Immersion



Surface Mounted
Fixed

Application Description:

- Surface Mounted, Fixed
- Internal or External Areas; Linear Lighting Weatherproof Requirement
- Landscaping, Exterior Building Façades, Soffits or Alcoves, Cabinetry, Under seating, Wall Washing Applications

Product Name	IMMERSION
Description	Slim Design, Resin Coated, UV Protected, IP67 Weatherproof, 24V, Flexible Linear LED Tape
Material	Resin Coating, SMD LED Tape, Silicon Clip Holders, Silicon Ingress Protection End Caps
Dimensions	4.8W - Width: 8mm; Height: 5mm (incl clip w: 12mm h: 6mm) 14.4W - Width: 10mm; Height: 5mm (incl clip w: 14mm h: 6mm)
Driver Details	Remote 24V LED Driver 4.8w/m or 14.4w/m SMD LED, 3000K/4000K Available, CRI>80, Beam Angle: 120°, 400 or 1200 Luminaire Luminous Flux @ 3000K
IP Rating	67
IK Rating	03
Installation	Surface Mounted

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwelllighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwelllighting.com

TECHNICAL INFORMATION

ORDER CODE


AW5050IPC-(Temperature)-(Wattage)-(Length)-(Dimming)

Example: AW5050IPC-3000K-14.4W-3500-ND


Options:

Lighting Colour	Wattage	Length	Dimming
3000K	4.8W	5000mm	ND (Non-Dim)
4000K	14.4W	Custom (per 50mm)	11 (1-10V)
			DD (DALI)

Dimensions Line Diagram:

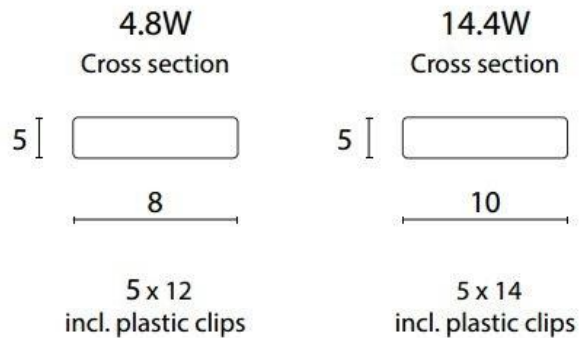

Photometrics:

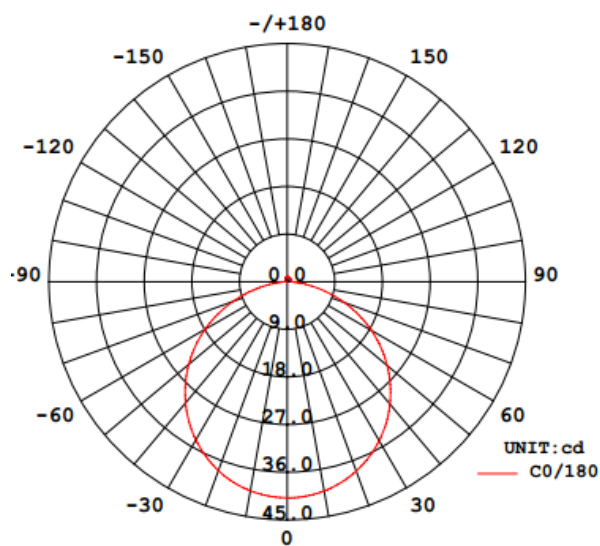

We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au

34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com

TECHNICAL INFORMATION

Product Application Photos:



We reserve the right to make technical changes.

Should you have any enquiries, please consult an Actwell representative. Email: sales@actwellighting.com.au
34 Mary Parade | Rydalmere NSW 2116 | Australia | T +61 2 9638 3333 | www.actwellighting.com