

ACTWELL

LIGHTING



TECHNICAL INFORMATION

AW4121-1TR LYON 15 / 20 / 25

APPLICATION AREA



Commercial



Child Care



Hospitality



Educational Facilities



Sports Centers



Residential



Shopping Centers



Galleries and Museums



Retail



Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwellighting.com.au

| PRODUCT NAME | |
|-------------------|---|
| LYON 15 / 20 / 25 | |
| Description | The Lyon Tracklight provides a contemporary option for track systems. Having a rotatable head, ease of install, and integrated switchable power settings; the Lyon provides unparalleled flexibility to any lighting application. |
| Materials | Die Cast Aluminium Body and Trim, Parabolic Anti- Glare Reflector, Clear Glass Diffuser |
| Dimensions | Diameter: 72mm; Height: 135mm |
| Driver | Integral LED Driver |
| Luminaire Details | Integrated Switch to select 15W, 20W, 25W Output 3000K or 4000K Available, CRI>90, Beam Angle: 24° or 60° 1200 Luminaire Luminous Flux at 3000K 60° |
| Ratings | IP20 IK03 |
| Rated Life | 5yr Warranty LM80 B10: 67,000 hrs <i>Environmental Impact: Luminaire > 95% Recyclable, Fitting Under Actwell Revitalisation Program to Refit Parts to End Waste</i> |
| Installation | Track Mounted |

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwellighting.com.au

ORDER CODE


AW4121-1TR-(Colour Finish)-(Temperature)-(Beam Angle)-(Watts)- (Beam Angle) (Dimming)

Example: AW4121-1TR-WH-3K-15W-24° -PH

OPTIONS



| Colour Finish | Temperature | Watts | Beam Angle | Dimming |
|---------------|-------------|-------|------------|----------------|
| WH (White) | 3K (3000K) | 15W | 24° | PH (Phase-Dim) |
| BK (Black) | 4K (4000K) | 20W | 60° | |
| | | 25W | | |

DIMENSIONS LINE DIAGRAM

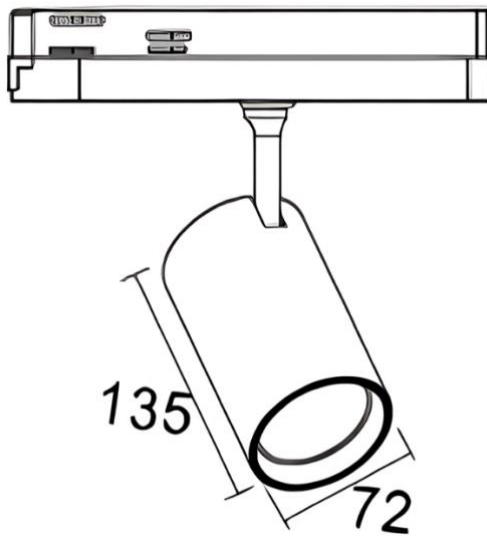

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

PHOTOMETRICS

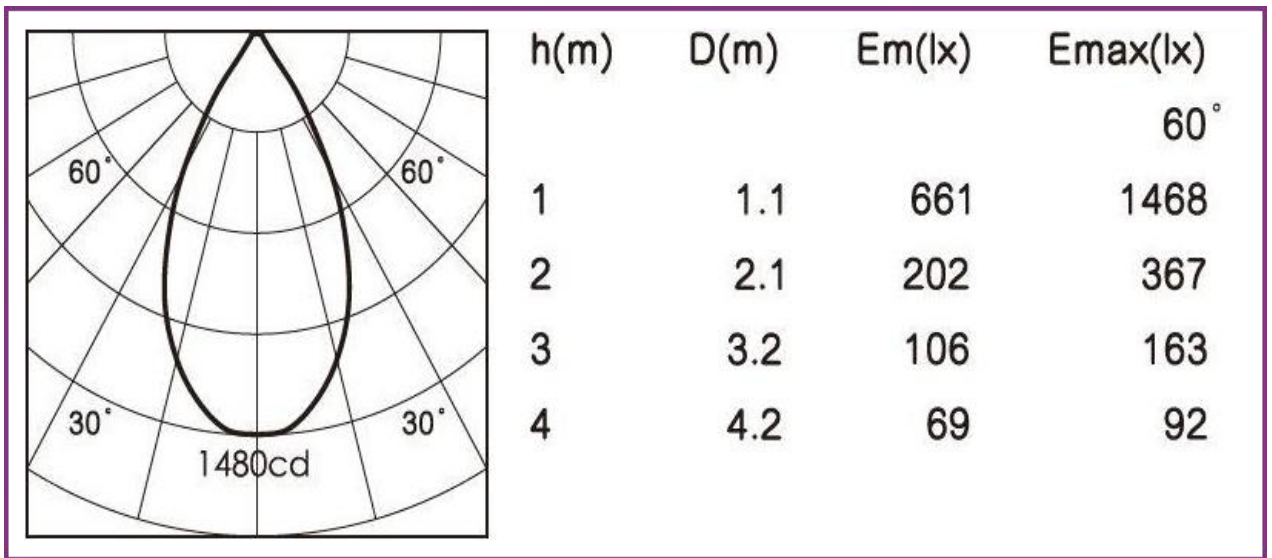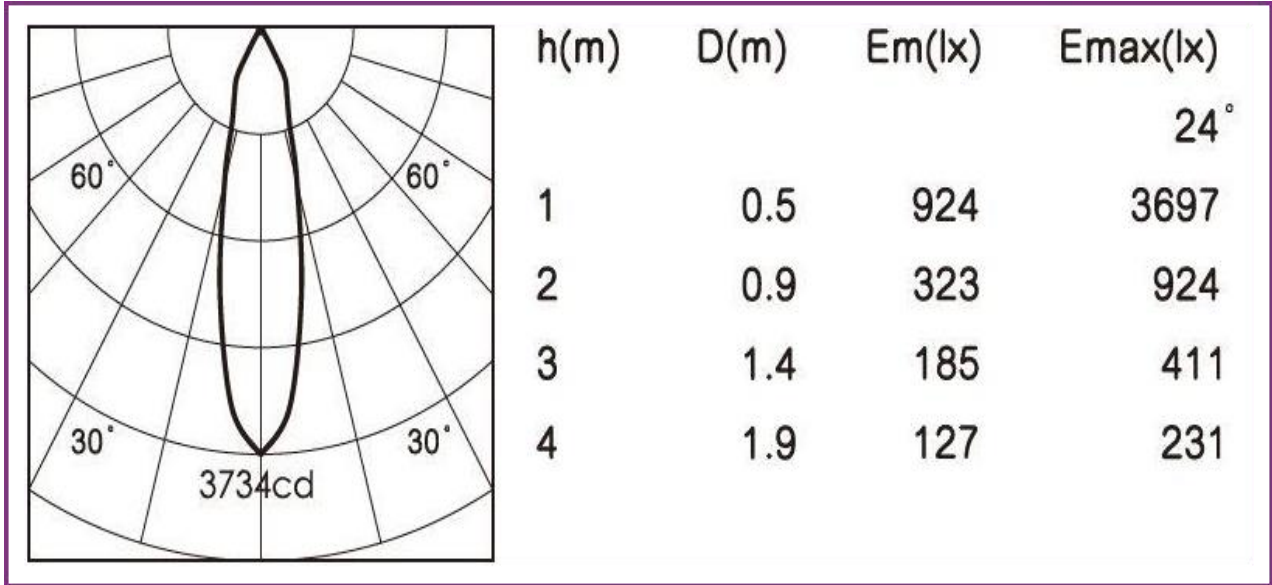

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

PRODUCT APPLICATION PHOTOS



Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative