


ACTWELL

LIGHTING

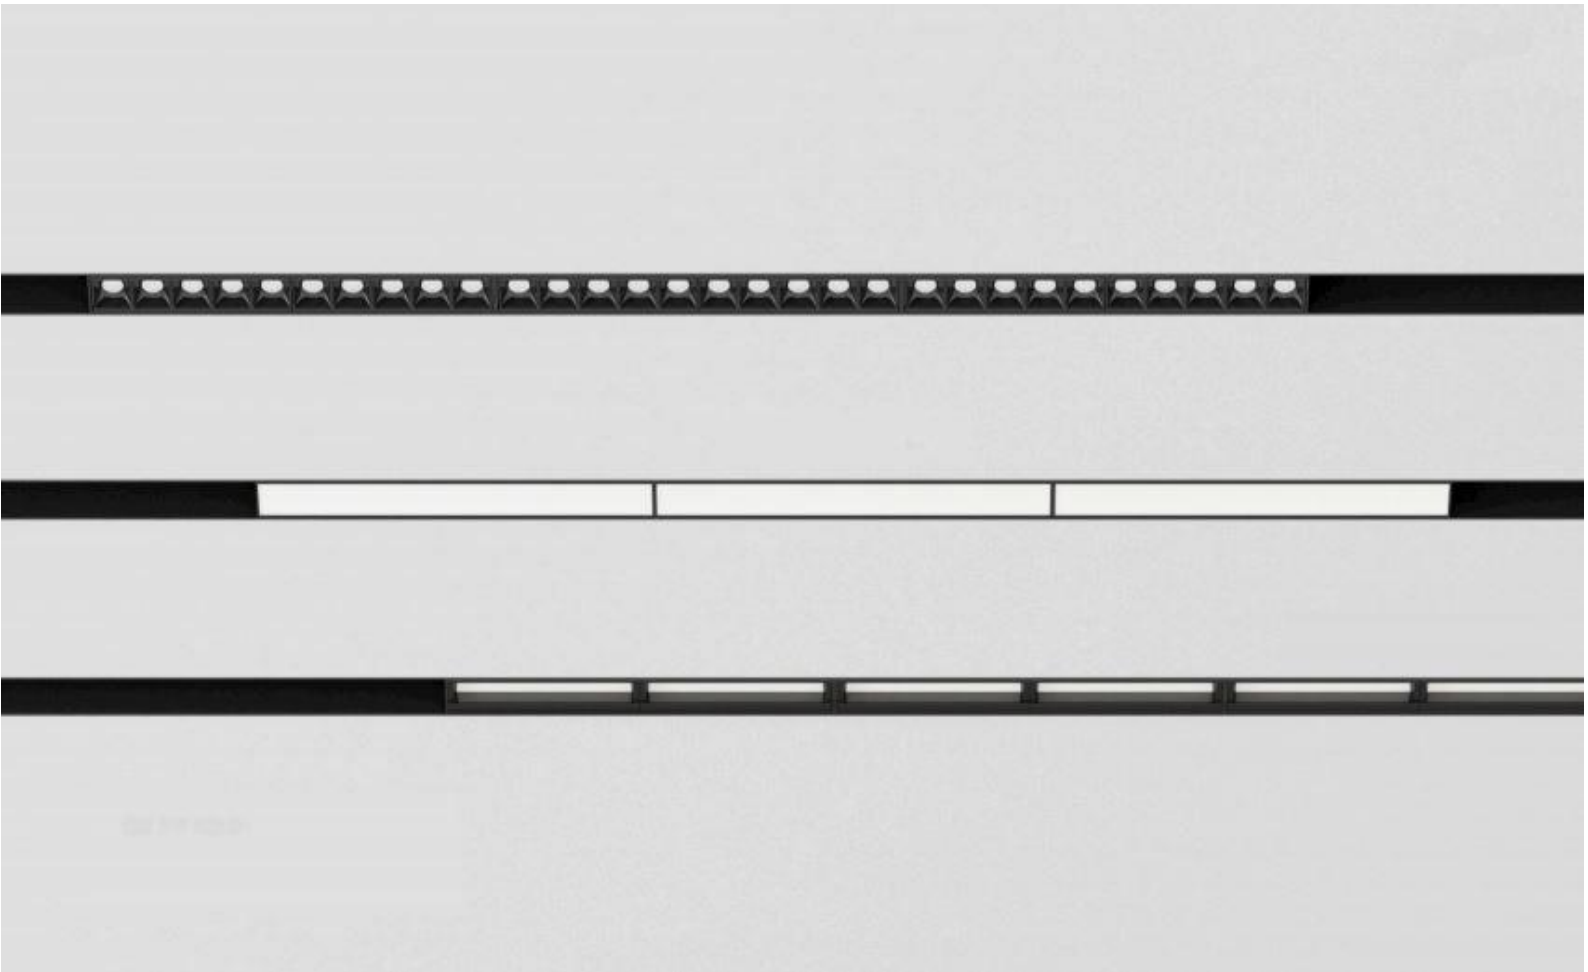

TECHNICAL INFORMATION
AW4152TR AW4153TR
DUPONT SCORE SERIES

APPLICATION AREA



Commercial



Educational Facilities



Hospitality



Shopping Centers



Sports Centers




Residential



Retail



Galleries and Museums



Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwelllighting.com.au

PRODUCT NAME	
DUPONT SCORE 15, DUPONT SCORE 30	
Description	The Dupont Score series offers a range of linear track light wattage options with specific degree beam angles. Mounted within a 48V magnetic track system, the Dupont track series offers flexibility and modification suitable for diverse applications.
Materials	Die Cast Aluminium Alloy Body and Trim, PVC Track Insert Clear Tempered Glass Diffuser
Dimensions	Dupont Score 15 - Length: 300mm Dupont Score 30 - Length: 600mm
Driver	Remote 48V LED Driver
Luminaire Details	15W/30W Option, 2700K/3000K/4000K Available, CRI>90, Beam Angle: 12°/24°/38°, SDCM<3, 1650 Lumens, 3300 Luminous Flux at 3000K 15W 38° Spot Lens
Ratings	IP20
Rated Life	5yr Warranty LM80 B10: 68,000 hrs <i>Environmental Impact: Luminaire > 95% Recyclable, Fitting Under Actwell Revitalisation Program to Refit Parts to End Waste</i>
Installation	Track Mounted

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



ORDER CODE

AW4152TR-(Lens Option)-(Wattage)-(Temperature)-(Beam Angle)-(Dimming)

AW4153TR-(Lens Option)-(Wattage)-(Temperature)-(Beam Angle)-(Dimming)


Example: AW4152TR-SP-15W-4K-24°-ND

All Track Configurations to be Provided for Design and Quotation

OPTIONS








Lens Option	Wattage	Temperature	Beam Angle	Dimming
SP (Spot)	15W	2.7K (2700K)	12°	ND (Non-Dim)
FR (Frosted)	30W	3K (3000K)	24°	DD (DALI-Dim)
RE (Recessed)		4K (4000K)	38°	

DIMENSION LINE DIAGRAM

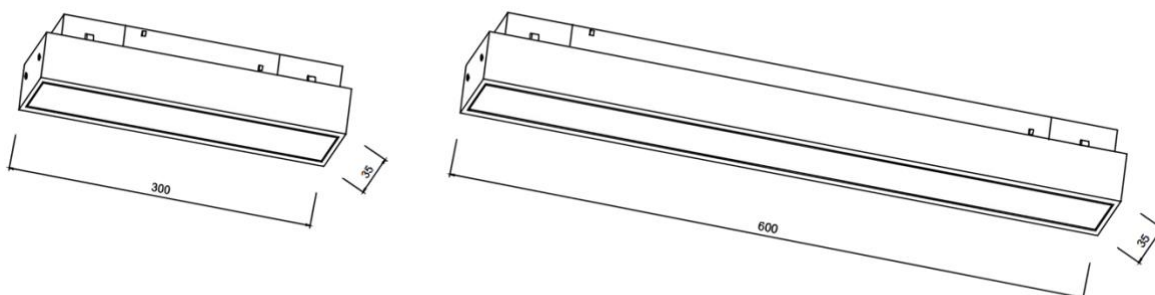


Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

TRACK MOUNT OPTIONS

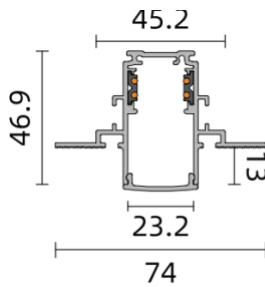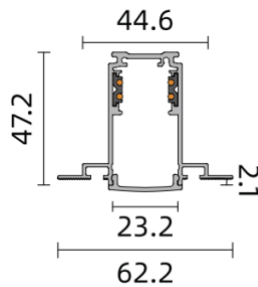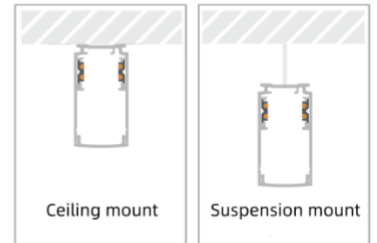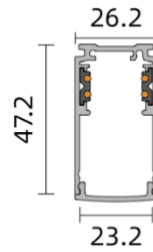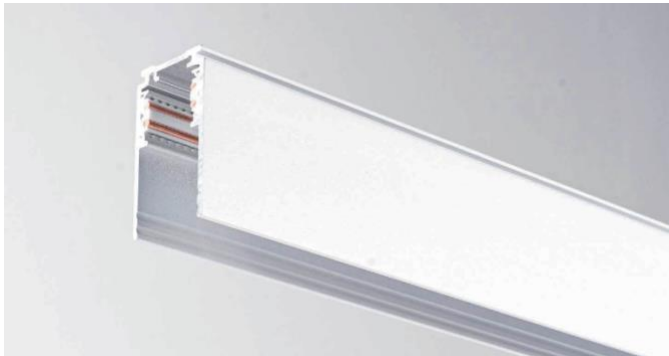


Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative


TRACK PARTS

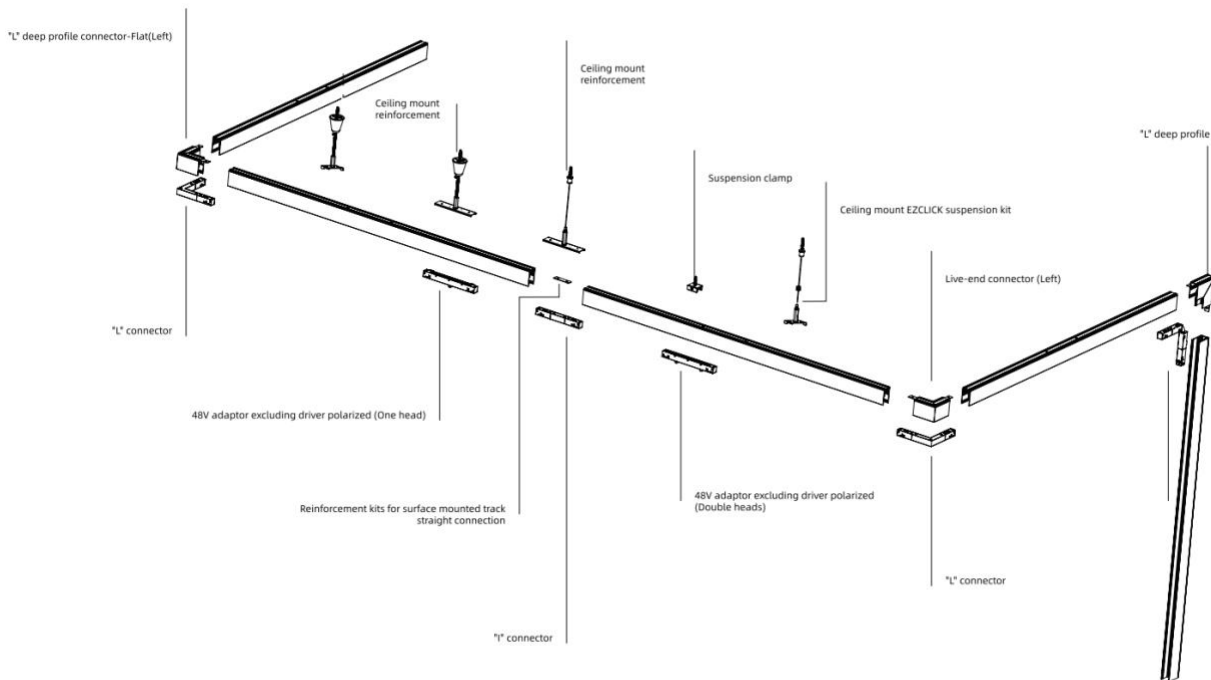


Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

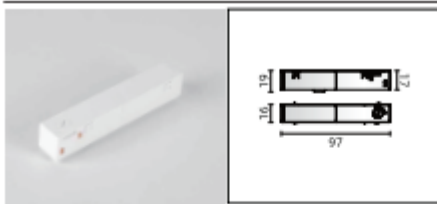


Live-end connector(Left)

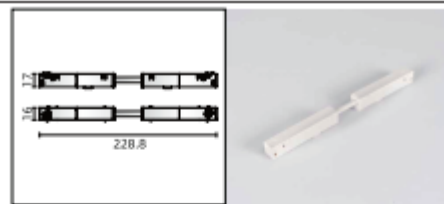


Flexible connector

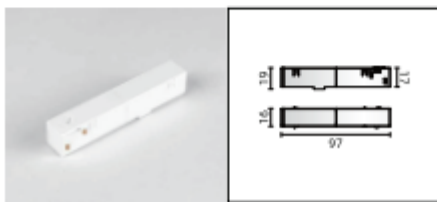


Live-end connector(Right)

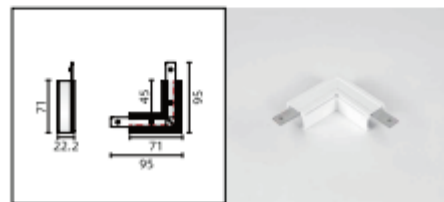

"L" Profile connector-Flat(Left)

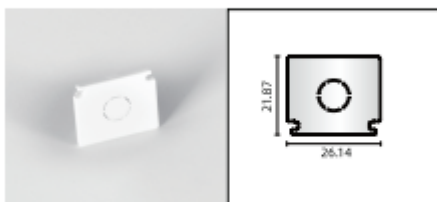


End cap

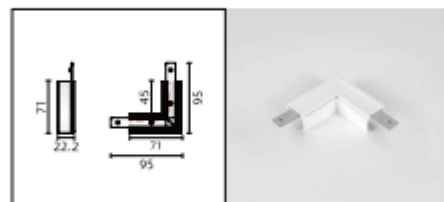


"L" Profile connector-Flat(Right)




"I" connector

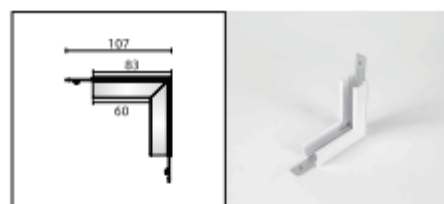

"L" Profile connector-Stereo

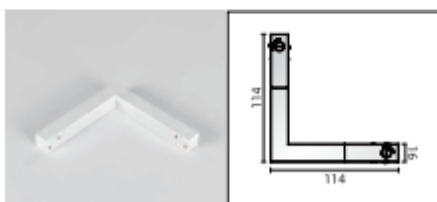

"L" connector

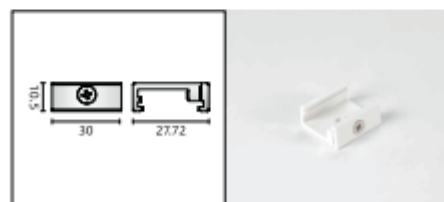


Suspension clamp


Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative




Ceiling mount, EZCLICK suspension kit with 1m rod

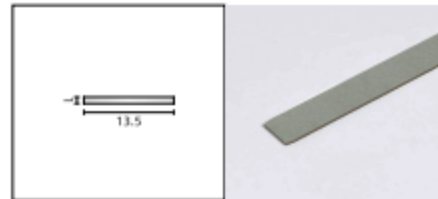


Metal strip (880mm)

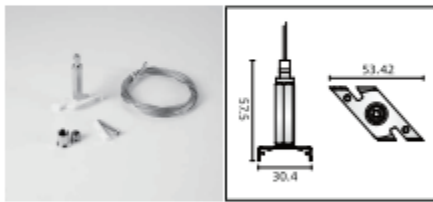

Ceiling mount, EZCLICK suspension kit with 1.5m wire

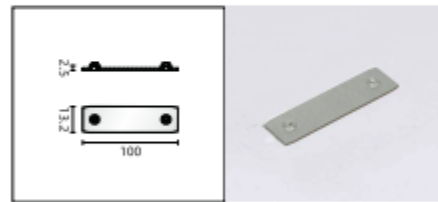

Reinforcement kit for surface mounted track straight connection

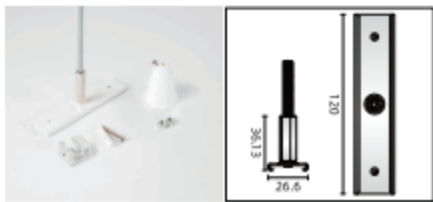

Ceiling mount reinforcement kit with 1m rod



Ceiling mount reinforcement kit with 1.5m wire



Track cover strip

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

PRODUCT APPLICATION PHOTOS

