


**A**CTWELL

LIGHTING

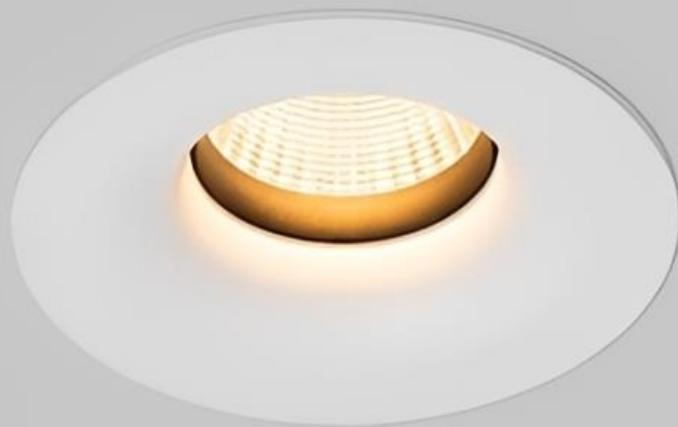

TECHNICAL INFORMATION  
**AW83-1RD CURVE 10**

APPLICATION AREA



Aged Care



Child Care



Commercial



Educational Facilities



Hospitality



Hospitals and Medical



Hotels



Shopping Centers



Retail



Residential

Actwell Trading reserves the right to make revisions and updates.  
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade  
Rydalmere NSW 2116 Australia



+61 2 9638 3333



[enquiries@actwellighting.com.au](mailto:enquiries@actwellighting.com.au)

PRODUCT NAME	
<b>CURVE 10</b>	
<b>Description</b>	The Curve recessed downlight luminaire emits a flowing gradient of light upon the trim providing a striking mural of light on the ceilings.
<b>Materials</b>	PVC Trim, Die Cast Aluminium Body, Semi Frosted PVC Diffuser, Steel Spring Clips
<b>Dimensions</b>	Diameter: 82mm; Height: 55mm; Cut Out: 70-75mm
<b>Driver</b>	180mA / 225mA / 350mA Remote LED Driver
<b>Luminaire Details</b>	7W/10W/12W Wattage Options Available, 2700K/3000K/4000K Available, CRI>95, Beam Angle: 15°/24°/36°/60°, SDCM<3, Tunable White (2700-5000K) Option, UGR<16. 1800 Lumens, 1550 Luminaire Luminous Flux at 12W 3000K 36°. Lumen Efficacy: 150Lm/W
<b>Ratings</b>	IP65   IC-4   IK05
<b>Rated Life</b>	5yr Warranty   LM80 B10: 63,000 hrs  <i>Environmental Impact: Luminaire &gt; 95% Recyclable, Fitting Under Actwell Revitalisation Program to Refit Parts to End Waste</i>
<b>Installation</b>	Recessed

Actwell Trading reserves the right to make revisions and updates.  
If you have any enquiries please consult an Actwell Lighting Representative

ORDER CODE

AW83-1RD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW83-1RD-WH-3K-36°-ND

OPTIONS

Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	2.7K (2700K)	15°	ND (Non-Dim)
BK (Black)	3K (3000K)	24°	PH (Phase-Dim)
	4K (4000K)	36°	DD (DALI-Dim)
	5K (5000K)	60°	
	TW (Tunable)		

DIMENSION LINE DIAGRAM

