


ACTWELL

LIGHTING

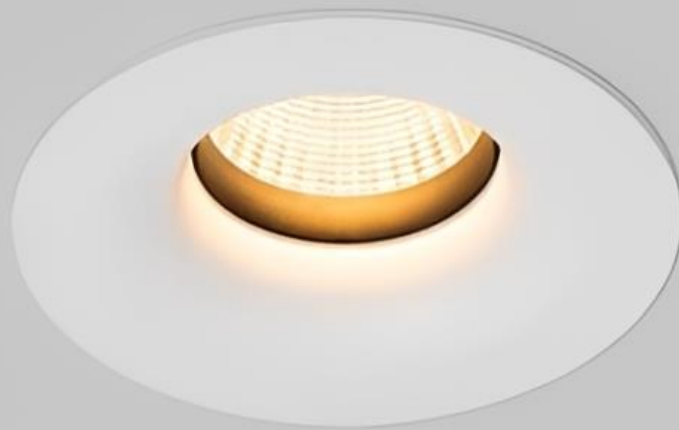

TECHNICAL INFORMATION
AW83-2RD CURVE 15

APPLICATION AREA



Aged Care



Child Care



Commercial



Educational Facilities



Hospitality



Hospitals and Medical



Hotels



Shopping Centers



Retail



Residential



Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwellighting.com.au

PRODUCT NAME	
CURVE 15	
Description	The Curve recessed downlight luminaire emits a flowing gradient of light upon the trim providing a striking mural of light on the ceilings.
Materials	PVC Trim, Die Cast Aluminium Body, Semi Frosted PVC Diffuser, Steel Spring Clips
Dimensions	Diameter: 105mm; Height: 65mm; Cut Out: 85-95mm
Driver	225mA / 350mA / 500mA Remote LED Driver
Luminaire Details	10W/12W/15W Wattage Options Available, 2700K/3000K/4000K Available, CRI>95, Beam Angle: 15°/24°/36°/60°, SDCM<3, Tunable White Option, UGR<16. 2300 Lumens, 2000 Luminaire Luminous Flux at 15W 3000K 36°. Lumen Efficacy: 152Lm/W
Ratings	IP65 IC-4 IK05
Rated Life	5yr Warranty LM80 B10: 63,000 hrs <i>Environmental Impact: Luminaire > 95% Recyclable, Fitting Under Actwell Revitalisation Program to Refit Parts to End Waste</i>
Installation	Recessed

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

ORDER CODE

AW83-2RD-(Colour Finish)-(Temperature)-(Wattage)-(Beam Angle)-(Dimming)

Example: AW83-2RD-WH-3K-10W-36°-ND

OPTIONS

Colour Finish	Temperature	Wattage	Beam Angle	Dimming
WH (White)	2.7K (2700K)	10 (10W)	15°	ND (Non-Dim)
BK (Black)	3K (3000K)	12 (12W)	24°	PH (Phase-Dim)
	4K (4000K)	15 (15W)	36°	DD (DALI-Dim)
	5K (5000K)		60°	

DIMENSION LINE DIAGRAM

