

ACTWELL

LIGHTING



TECHNICAL INFORMATION
AW6326-2EW PALAIS II

APPLICATION AREA



Aged Care



Child Care



Hospitals and Medical



Hospitality



Residential



Hotels



Educational Facilities



Corridors



Building Perimeters



Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwellighting.com.au

PRODUCT NAME	
PALAIS II	
Description	The Palais II is a rectangular luminaire that provides subtle indirect downward lighting to the floor. Suitable for pathway applications. Weather and Corrosion Resistant.
Materials	Aluminium Die-Casting Body, Powder Coated for Outdoor Use PC Diffuser
Dimensions	Width: 200mm, Height: 90mm, Projection: 36mm
Driver	Integral LED Driver Remote DALI Driver
Luminaire Details	6W SMD LED, 2700K/3000K/4000K Available, CRI> 90, Beam Angle: 120°, SDCM<3, UGR<17, 450 Lumens, 150 Luminaire Luminous Flux at 3000K Lumen Efficacy: 75Lm/W
Ratings	IP54 IK09
Rated Life	5yr Warranty LM80 B10: 67,000 hrs <i>Environmental Impact: Luminaire > 95% Recyclable, Fitting Under Actwell Revitalisation Program to Refit Parts to End Waste</i>
Installation	Wall Mounted

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

ORDER CODE


AW6326-2EW-(Colour Finish)-(Temperature)-(Dimming)

Example: AW6326-2EW-BK-3K-ND

OPTIONS

Colour Finish	Temperature	Dimming
WH (White)	2.7K (2700K)	ND (Non-Dim)
BK (Black)	3K (3000K)	DD (DALI-Dim)
	4K (4000K)	

DIMENSIONS LINE DIAGRAM

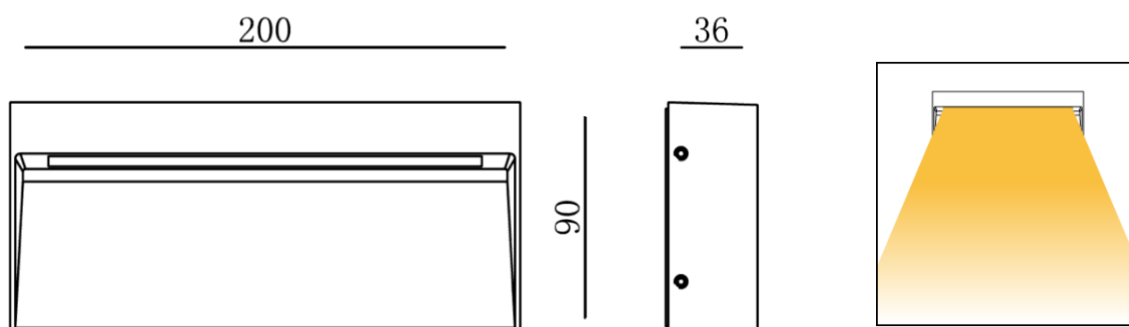

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

PRODUCT APPLICATION PHOTOS



V1

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative