


ACTWELL

LIGHTING

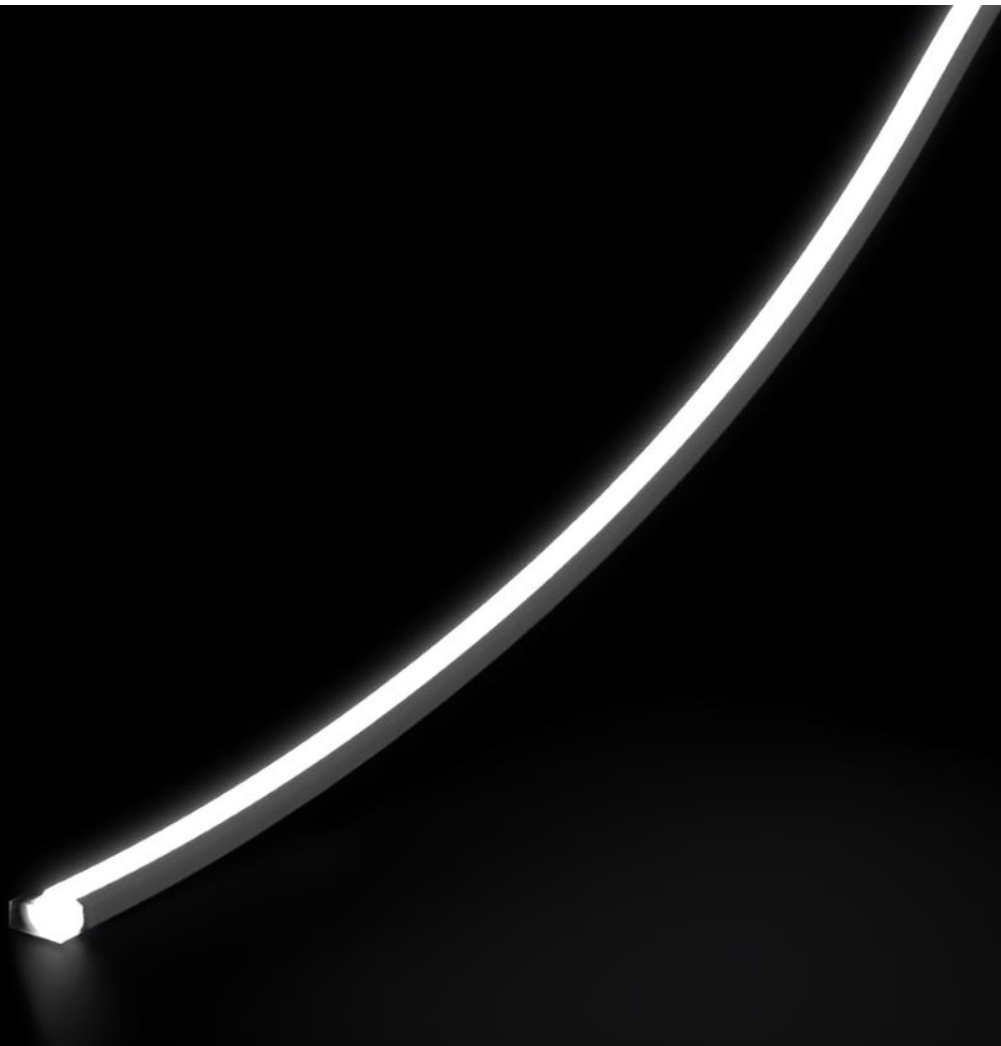

TECHNICAL INFORMATION
AW5007L HYDROPHIS 74

APPLICATION AREA



Aged Care



Galleries and Museums



Corridors



Hospitals and Medical



Hospitality



Residential



Hotels



Shopping Centers



Retail



Sports Centers



Reception Desk



Educational Facilities



Theatres



Kitchen and Bathroom
Cabinetry



Ceiling Soffits



Under Seat Lighting



Under Handrails



Kitchen and Bathroom
Joinery




Display Shelving



Landscaping



Wet Area

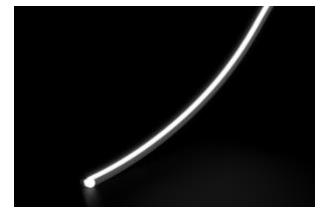

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwellighting.com.au

PRODUCT NAME	
HYDROPHIS 74	
Description	Top Bending, Miniature Flexible Bending LED Strip, Translucent Non-Dotting Diffuser, Weatherproof, 24V, High Durability, Corrosion / Solvents / Flame UV Resistant / Submersible, Internal or External Areas. Mountable Within Aluminium Extrusions
Materials	PVC Casing, Silicon Diffuser, UV and Chemical Resistant Coating, 3M Glue Backing
Dimensions	Width: 7mm; Height: 4mm
Driver	24Vdc Constant Voltage Remote Driver
Luminaire Details	10W/M 2216 SMD LED, Beam Angle: 160°, CRI>90, UGR<20, SDCM<2, 10 - 120 Luminaire Luminous Flux per meter at 3000K
Ratings	IP68 IK08
Rated Life	5yr Warranty L80 B10: 65,000hrs
Installation	Surface Mounted, Mountable within AWS1613MTFT / AWS0709MTFT / AWS1515MTTC Aluminium Channels with Diffuser

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333




enquiries@actwelllighting.com.au


Example: AW5007L-2.7K-mm-ND

Temperature	Length	Dimming
2.7K (2700K)	(in mm)	ND (Non-Dim)
3K (3000K)		DD (DALI-Dim)
4K (4000K)		DMX
		DSI
		11 (1-10V)

 enquiries@actwellighting.com.au



Outline lighting



Groove lighting



Cornice lighting



FEATURES AND OPTIONS



**Beam
Angle**



**Bending
Diameter**



**Flame
Resistant**



**UV
Resistant**



**Solvents
Resistant**



**Saltwater
Resistant**



**IP68
Protection**



**IK08
Protection**

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333





enquiries@actwelllighting.com.au

PROFILE DRAWINGS


Glue Process (IP67)

Injection Moulded (IP67)

Unit:mm [inch]

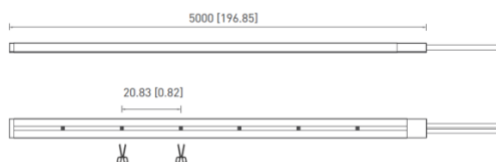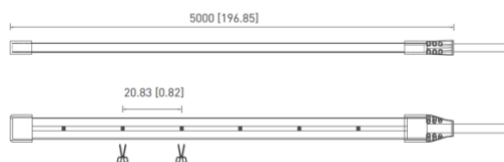


Bend direction

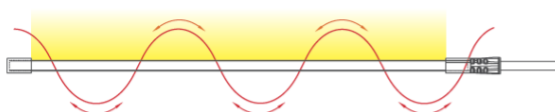

Bending Diameter



Sectional view




Front cap

Glue Process (IP67)




Closing End-cap

Glue Process (IP67)



Molding pressed (IP67)




Molding pressed (IP67)



Remarks: "L" is the standard size of the light strip, can be customized according to the multiple of the minimum cutting unit length.

IP Process Technology

Glue Process (IP67)

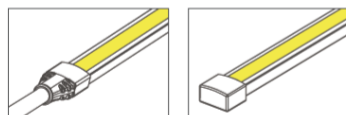

Color
Single color

Outlet Direction
Straight

Molding Pressed (IP67)




Color
Single color

Outlet Direction
Straight

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

PHOTOMETRICS

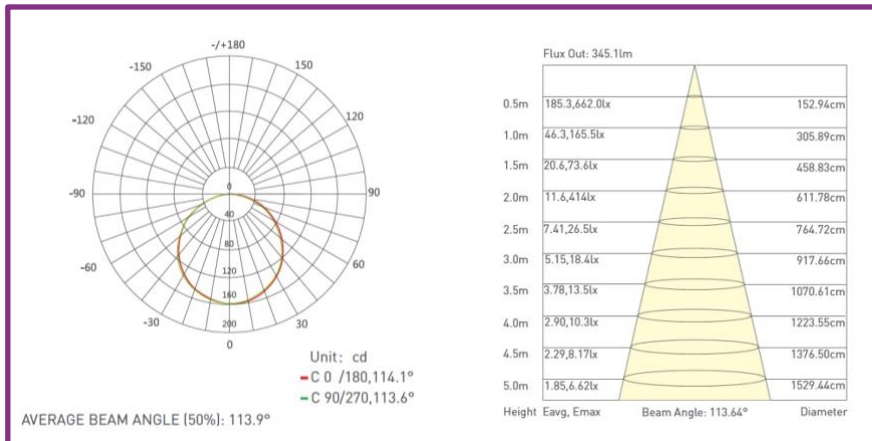

PRODUCT APPLICATION PHOTOS

