

ACTWELL

LIGHTING



TECHNICAL INFORMATION
AW70-2RD AQUALUME

APPLICATION AREA



Aged Care



Child Care



Commercial



Educational Facilities



Hospitality



Hospitals and Medical



Sports Centers



Library



Shopping Centers



Entry Foyers



Hotels



Galleries and Museums



Retail



Residential



Transportation



Corridors



Wet Areas



Infrastructure



Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwellighting.com.au

PRODUCT NAME	
AQUALUME	
Description	The Aqualume Series are a Durable and IP65 Waterproof Recessed Downlight with a Variable Range of Light Output and Size Options. Suitable for Wet Areas and Harsh Environment Applications.
Materials	Pressure Equalisation Vent and Tempered Glass Lens to Prevent Condensation, Corrosion-Resistant Aluminum / Stainless Steel. Hermetically Sealed Double Silicone Ring Housing. Waterproof Cable Entry. Highly Efficient Heat Sink for Rapid Heat Dissipation
Dimensions	Diameter: 164mm; Height: 98mm; Cut Out: 145mm
Driver	Remote LED Driver
Luminaire Details	25W 30W COB LED, 2700K/3000K/4000K/5000K Options Available, CRI>92, SDCM<3, UGR<19 with Glare Lens, Beam Angle: 20°/40°/60°, 110 Lumens per Watt, 95 Luminaire Luminous Flux at 3000K 40°.
Ratings	IP65 IC-4 IK07
Rated Life	5yr Warranty LM80 B10: 68,000 hrs <i>Environmental Impact: Luminaire > 95% Recyclable, Fitting Under Actwell Revitalisation Program to Refit Parts to End Waste</i>
Installation	Recessed

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwelllighting.com.au

ORDER CODE


AW70-2RD-(Colour Finish)-(Wattage)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW70-2RD-WH-25W-3K-20°-ND

OPTIONS

Colour Finish	Wattage	Temperature	Beam Angle	Dimming
WH (White)	25W	2.7K (2700K)	20°	ND (Non-Dim)
BK (Black)	30W	3K (3000K)	40°	PH (Phase-Dim)
		4K (4000K)	60°	DD (DALI-Dim)
		5K (5000K)		11 (1-10V)

DIMENSION LINE DIAGRAM

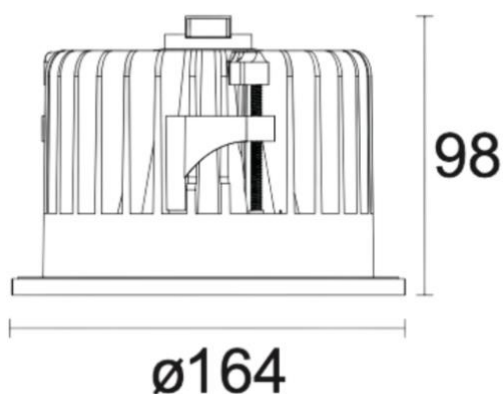

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia




+61 2 9638 3333



enquiries@actwelllighting.com.au

IP65 WATERPROOF DESIGN

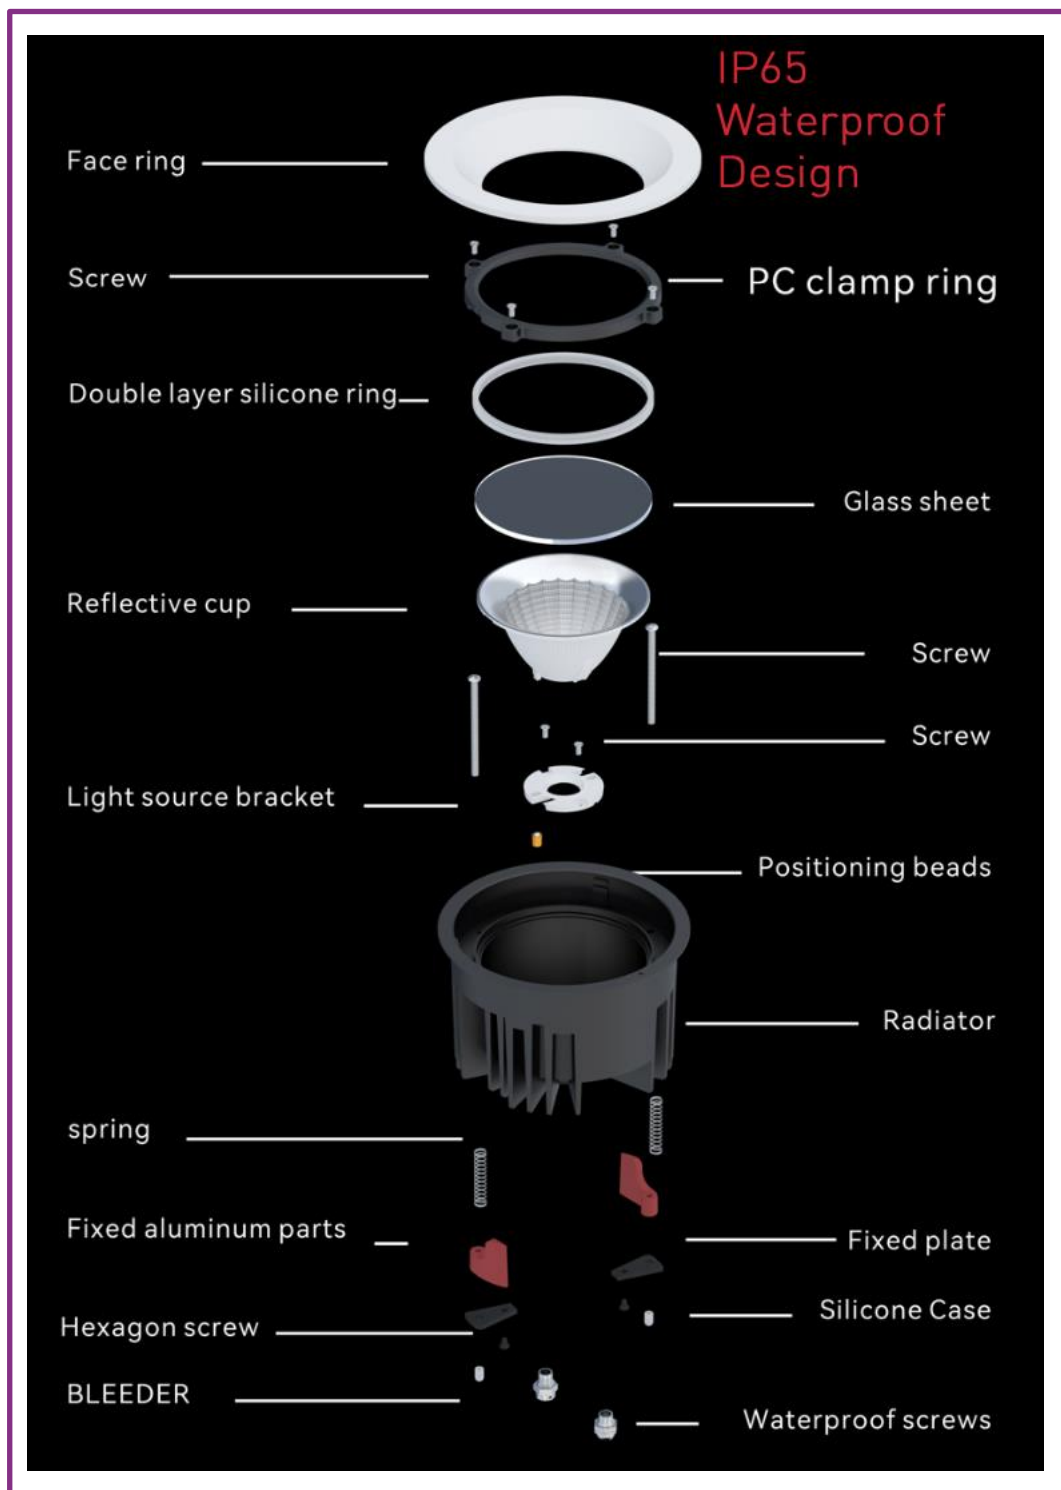

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwelllighting.com.au

PRODUCT APPLICATION PHOTOS



V1

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwelllighting.com.au