

ACTWELL

LIGHTING



TECHNICAL INFORMATION
AW95RD DECATUR 40

APPLICATION AREA



Aged Care



Child Care



Commercial



Educational Facilities



Hospitality



Hospital and Medical



Retail



Shopping Centers



Infrastructure



Auditorium



Warehouses



Sports Facilities



Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative



34 Mary Parade
Rydalmere NSW 2116 Australia



+61 2 9638 3333



enquiries@actwellighting.com.au

PRODUCT NAME	
DECATUR 40	
Description	Glare Control Dark Light Reflector, Deep Baffle, Superior Uniformity & Colour Rendering, Fixed, Recessed LED Downlight
Materials	Die Cast Aluminium Trim and Body, Anodised Matt Light Reflector, Parabolic PC Reflector, Die Cast Aluminium Heat Sink Rods for Maximal Heat Dissipation, Clear Glass Diffuser
Dimensions	Diameter: 180mm; Height: 160mm; Cut Out: 165mm
Driver	1050mA Remote LED Driver
Luminaire Details	40W COB LED, 2700K/3000K/4000K/5000K, CRI>93, Beam angle: 24°/36°/45°, SDCM<2, UGR<17, 4050 Lumens, 3470 Luminaire Luminous Flux at 3000K 36°. Efficacy: 101Lm/W.
Ratings	IP44 IC-4 IK05
Rated Life	5yr Warranty L80 B10: 75,000hrs <i>Environmentally Sustainable Replaceable LED Module</i> <i>Environmental Impact: Luminaire > 95% Recyclable, Fitting Under Actwell Revitalisation Program to Refit Parts to End Waste</i>
Installation	Recessed

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

ORDER CODE


AW95RD-(Colour Finish)-(Temperature)-(Beam Angle)-(Dimming)

Example: AW95RD-WH-3K-36°-ND

OPTIONS


Colour Finish	Temperature	Beam Angle	Dimming
WH (White)	2.7K (2700K)	24°	ND (Non-Dim)
BK (Black)	3K (3000K)	36°	PH (Phase-Dim)
	4K (4000K)	45°	DD (DALI-Dim)
	5K (5000K)		

DIMENSION LINE DIAGRAM

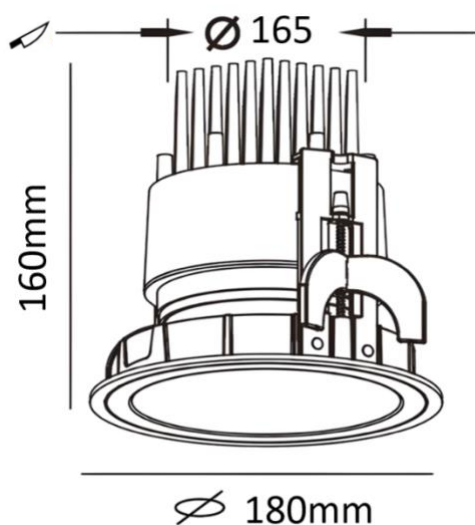

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative

PRODUCT APPLICATION PHOTOS

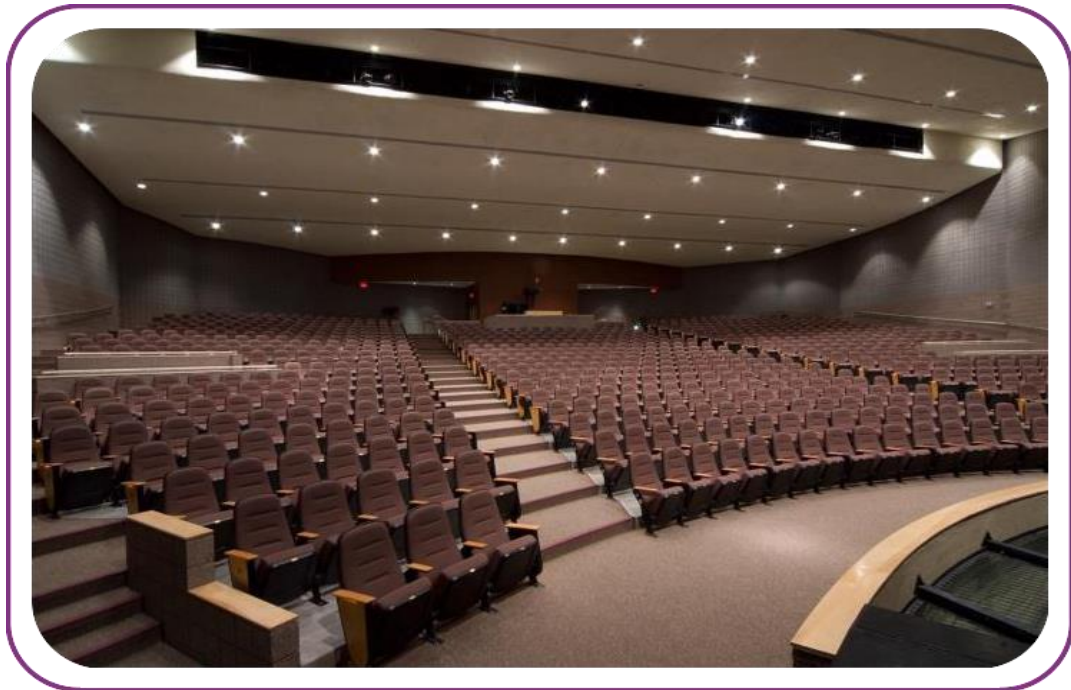

Actwell Trading reserves the right to make revisions and updates.
If you have any enquiries please consult an Actwell Lighting Representative